










Shower head

28 504 670



- 180-210 mm projection
- ball-joint pivotable through 30°
- normal flow
- with anti-scale system
- spray head Ø 100mm
- rosette 60 x 60 mm
- 1/2" connection
- max. flow 7 l/min
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB, WELL

	Brushed Champagne (22kt Gold)	28 504 670-46
	Chrome	28 504 670-00
	Brushed Platinum	28 504 670-06
	Platinum	28 504 670-08
	Dark Chrome	28 504 670-19
	Brushed Durabrass (23kt Gold)	28 504 670-28
	Champagne (22kt Gold)	28 504 670-47
	Brushed Chrome	28 504 670-93
	Brushed Dark Platinum	28 504 670-99

Recommended miscellaneous



Concealed wall elbow


35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm


Shower head

28 504 670

mm [inches]

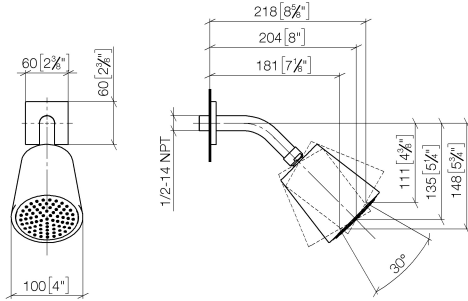


Flow rate chart

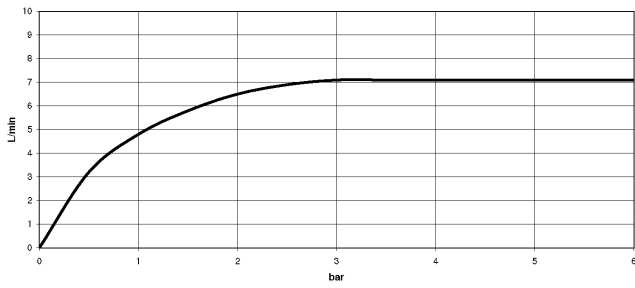

Shower head

28 504 670

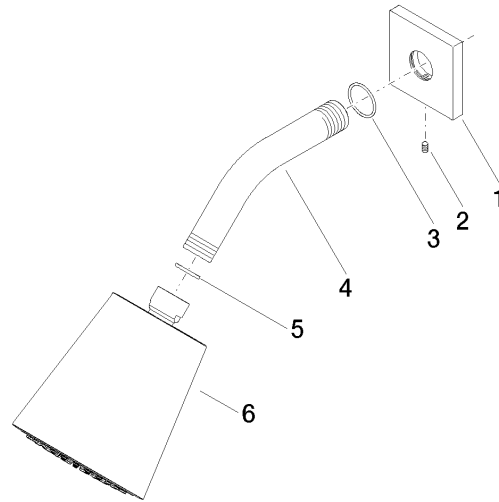

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 98 003-46	rosette	1	30
2	09 31 11 048 90	pin	1	2
3	09 14 10 026 90	seal	1	2
4	09 11 03 011-46	connection	1	30
5	09 14 20 002 90	seal	1	60
6	90 12 05 054 00-46	shower	1	30





















Hand shower set with integrated shower holder

27 802 970



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette 60 x 60 mm
- 1/2" connection
- WRAS: 1912049

Intrinsic protection against back flow.

	Brushed Champagne (22kt Gold)	27 802 970-46
	Chrome	27 802 970-00
	Chrome	27 802 970-00 0010
	Brushed Platinum	27 802 970-06 0010
	Brushed Platinum	27 802 970-06
	Platinum	27 802 970-08 0010
	Platinum	27 802 970-08
	Dark Chrome	27 802 970-19
	Dark Chrome	27 802 970-19 0010
	Brushed Durabrass (23kt Gold)	27 802 970-28 0010
	Brushed Durabrass (23kt Gold)	27 802 970-28
	Matte Black	27 802 970-33
	Matte Black	27 802 970-33 0010
	Brushed Champagne (22kt Gold)	27 802 970-46 0010
	Champagne (22kt Gold)	27 802 970-47
	Champagne (22kt Gold)	27 802 970-47 0010
	Brushed Chrome	27 802 970-93
	Brushed Chrome	27 802 970-93 0010
	Brushed Dark Platinum	27 802 970-99 0010
	Brushed Dark Platinum	27 802 970-99

Recommended miscellaneous



Concealed wall elbow

35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm




Hand shower set with integrated shower holder

27 802 970


Hand shower set with integrated shower holder

27 802 970

mm [inches]

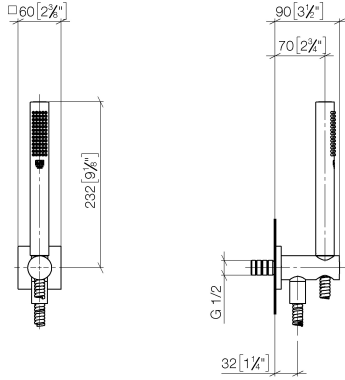


Flow rate chart

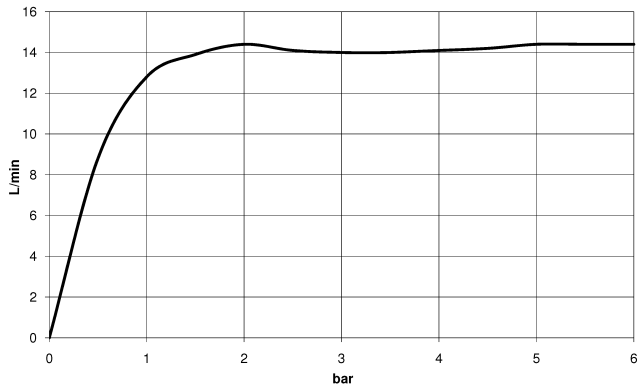

Hand shower set with integrated shower holder

27 802 970

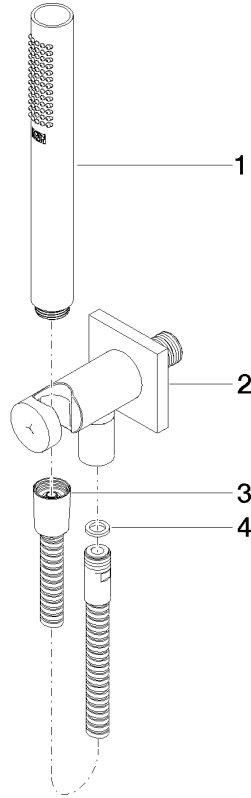

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-46	Hand shower	1	30
2	28 490 970-46	Wall elbow with integrated shower holder	1	30
3	90 30 02 072 00-46	Metal shower hose 1/2" x 3/8" x 1250 mm	1	30
4	09 14 20 026 90	seal	1	2

Concealed single-lever mixer with diverter

36 120 670



- automatic diverter
- cover plate 150 x 90 mm
- WRAS: 2207012

	Brushed Champagne (22kt Gold)	36 120 670-46
	Chrome	36 120 670-00
	Brushed Platinum	36 120 670-06
	Platinum	36 120 670-08
	Dark Chrome	36 120 670-19
	Brushed Durabronze (23kt Gold)	36 120 670-28
	Champagne (22kt Gold)	36 120 670-47
	Brushed Chrome	36 120 670-93
	Brushed Dark Platinum	36 120 670-99

Required miscellaneous



Concealed single-lever mixer with backflow preventor 35 021 970 90

- min. recess depth 80 mm
- max. recess depth 105 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction 12 340 970 90

Required miscellaneous



Concealed single-lever mixer 35 020 970 90

- min. recess depth 80 mm
- max. recess depth 105 mm

Required miscellaneous




xGRID Installation track 555 mm 12 360 970 90


Concealed single-lever mixer with diverter

36 120 670

mm [inches]

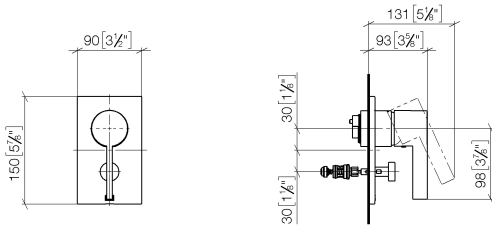


Flow rate chart

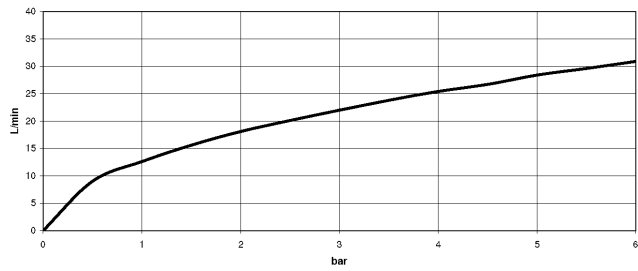

Concealed single-lever mixer with diverter

36 120 670

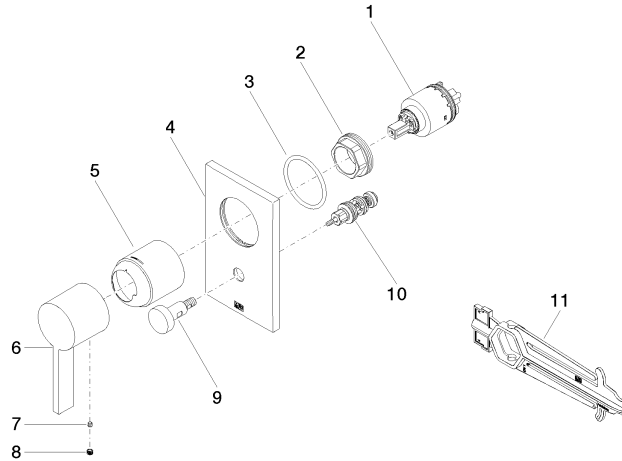


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 05 039 00 90	cartridge	1	2
2	09 24 04 448 90	nut	1	2
3	09 14 10 084 90	seal	1	2
4	09 11 02 258-46	plate	1	30
5	09 11 02 260-46	sleeve	1	30
6	09 20 67 007-46	handle	1	30
7	09 31 11 099 90	pin	1	2
8	09 31 20 109 90	plug	1	2
9	90 31 09 139 00-46	pull-rod	1	30
10	90 21 34 081 00 90	diverter	1	2
11	09 30 09 064 90	key	1	2

Concealed single-lever mixer

#Error



- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- 2x integrated supply stop
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 60 mm
- WRAS: 2207012

Recommended miscellaneous

Extension 25 mm

12 191 970 90



Recommended miscellaneous

Extension 25 mm

12 190 970 90



Recommended miscellaneous



Drybox Concealed single-lever mixer with and without diverter
 • Overflow is part of the scope of delivery.

39 121 970 90

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction

12 340 970 90

Required miscellaneous

xGRID Installation track 555 mm


12 360 970 90




Concealed single-lever mixer

#Error

mm [inches]

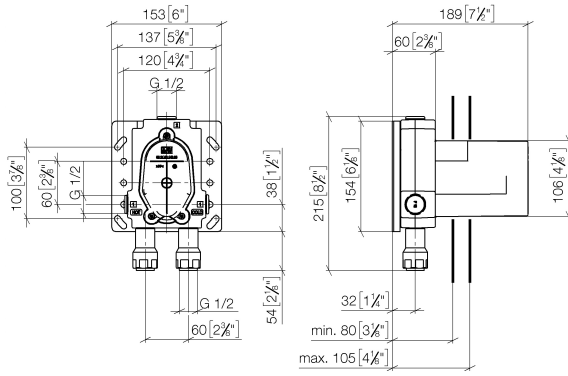


Flow rate chart

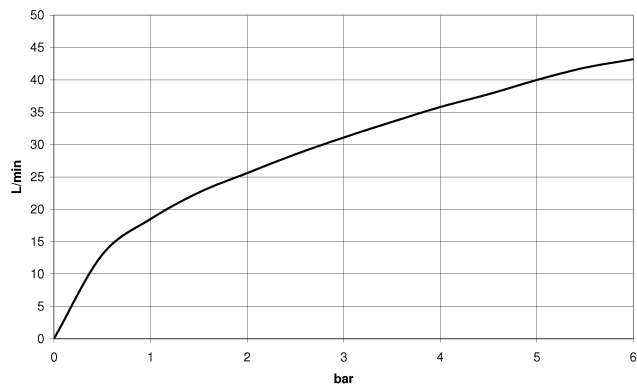

Concealed single-lever mixer

#Error

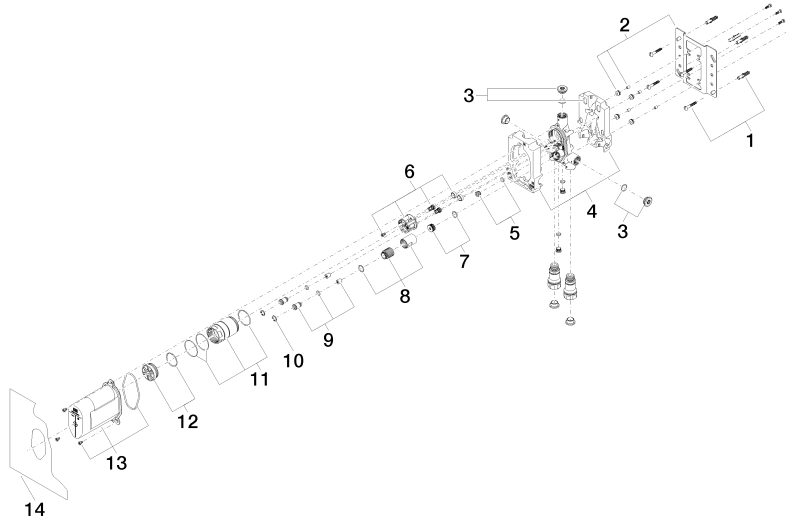


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	04 17 20 128 00 90	holder	1	2
3	04 31 20 006 00 90	plug	2	2
4	09 11 11 058 90	accessories	1	2
5	04 31 20 039 10 90	plug	1	2
6	90 18 40 151 00 90	insert	1	2
7	90 31 20 098 00 90	plug	1	2
8	90 17 01 189 00 90	sleeve	1	2
9	04 24 03 223 00 90	insert	2	2
10	09 16 01 014 90	ring	2	2
11	90 17 01 187 00 90	sleeve	1	2
12	04 31 20 100 00 90	plug	1	2
13	90 21 02 148 00 90	cap	1	2
14	04 14 03 155 00 90	gasket kit	1	2

Concealed wall elbow

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

Recommended miscellaneous

Leak protection 1/2"


12 010 970 90



Concealed wall elbow

#Error


mm [inches]

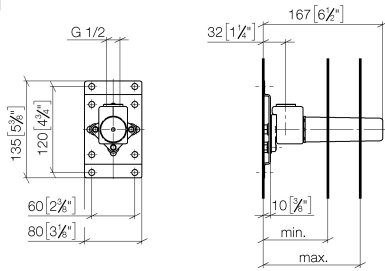

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

Concealed wall elbow

#Error

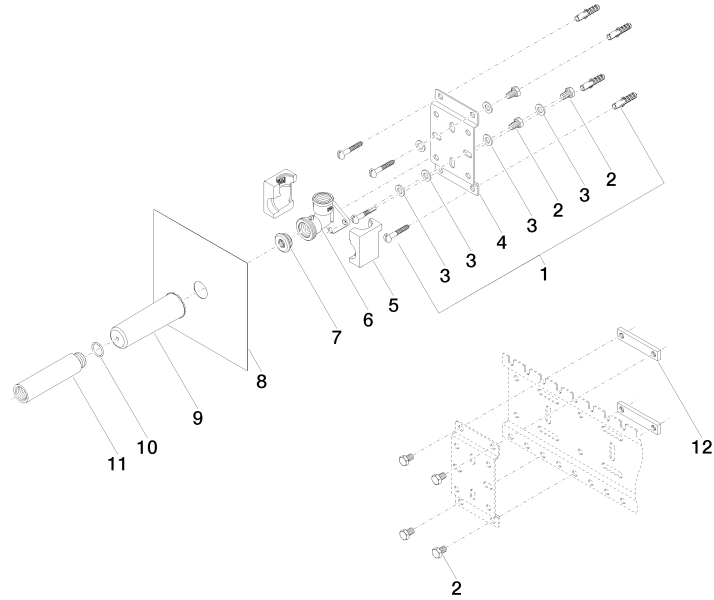


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2

Drybox Concealed single-lever mixer with and without diverter


#Error



- Dimensions 300 x 400 x 80 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

Drybox Concealed single-lever mixer with and without diverter

#Error

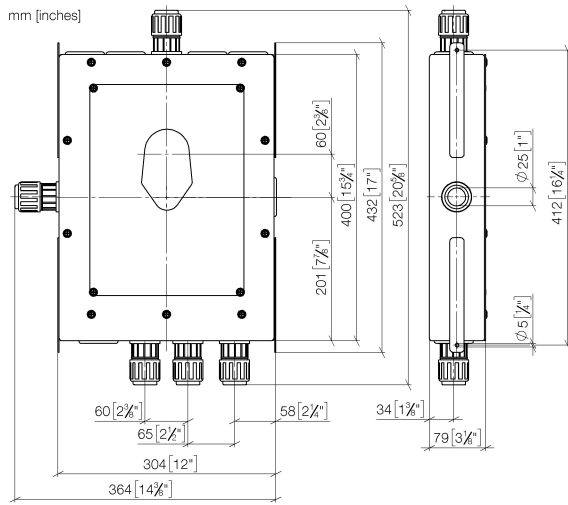

Leak protection 1/2"

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

Leak protection 1/2"

#Error

mm [inches]

