

Rain shower with wall fixing 220 mm

28 649 670



- 450 mm projection
- rain shower Ø 220 mm
- rain flow
- rosette 65 x 65 mm
- 1/2" connection
- with anti-scale system
- quick clearing
- WRAS: 1707033
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Platinum	28 649 670-06
	Chrome	28 649 670-00
	Platinum	28 649 670-08
	Dark Chrome	28 649 670-19
	Brushed Durabronze (23kt Gold)	28 649 670-28
	Brushed Champagne (22kt Gold)	28 649 670-46
	Champagne (22kt Gold)	28 649 670-47
	Brushed Chrome	28 649 670-93
	Brushed Dark Platinum	28 649 670-99

Recommended miscellaneous



Concealed wall elbow


35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm


Rain shower with wall fixing 220 mm

28 649 670

mm [inches]

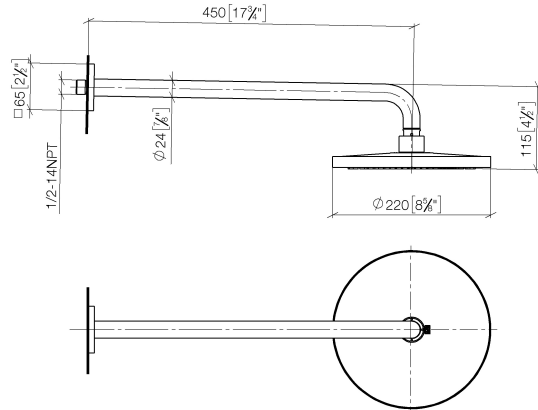


Flow rate chart

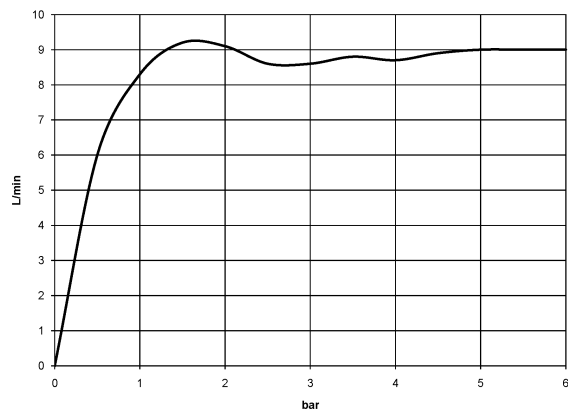

Rain shower with wall fixing 220 mm

28 649 670

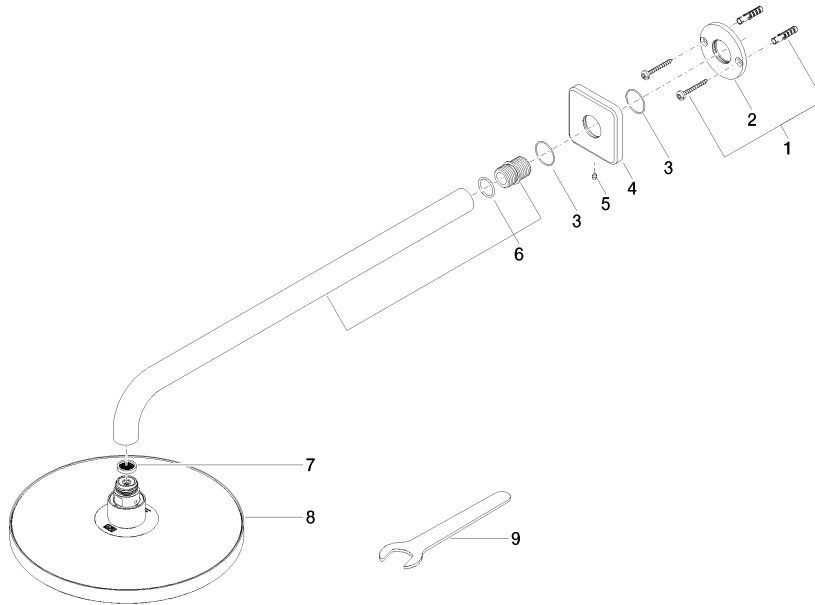

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 032 00 90	fixing set	1	2
2	09 17 20 120 90	holder	1	2
3	09 14 10 150 90	seal	2	2
4	09 27 67 015-06	rosette	1	10
5	09 31 11 038 90	pin	1	2
6	90 11 03 070 00-06	pipe	1	10
7	09 23 01 075 90	insert	1	2
8	04 12 05 092 00-06	shower	1	10
9	09 30 09 069 90	key	1	2

Hand shower set with integrated shower holder

27 802 970



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette 60 x 60 mm
- 1/2" connection
- max. flow 15 l/min
- WRAS: 1912049

Intrinsic protection against back flow.

	Brushed Platinum	27 802 970-06
	Chrome	27 802 970-00
	Chrome	27 802 970-00 0010
	Brushed Platinum	27 802 970-06 0010
	Platinum	27 802 970-08 0010
	Platinum	27 802 970-08
	Dark Chrome	27 802 970-19
	Dark Chrome	27 802 970-19 0010
	Brushed Durabronze (23kt Gold)	27 802 970-28 0010
	Brushed Durabronze (23kt Gold)	27 802 970-28
	Matte Black	27 802 970-33
	Matte Black	27 802 970-33 0010
	Brushed Champagne (22kt Gold)	27 802 970-46 0010
	Brushed Champagne (22kt Gold)	27 802 970-46
	Champagne (22kt Gold)	27 802 970-47
	Champagne (22kt Gold)	27 802 970-47 0010
	Brushed Chrome	27 802 970-93
	Brushed Chrome	27 802 970-93 0010
	Brushed Dark Platinum	27 802 970-99 0010
	Brushed Dark Platinum	27 802 970-99

Recommended miscellaneous



Concealed wall elbow


- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90


Hand shower set with integrated shower holder

27 802 970

mm [inches]

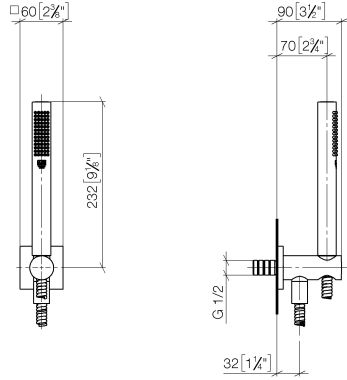


Flow rate chart

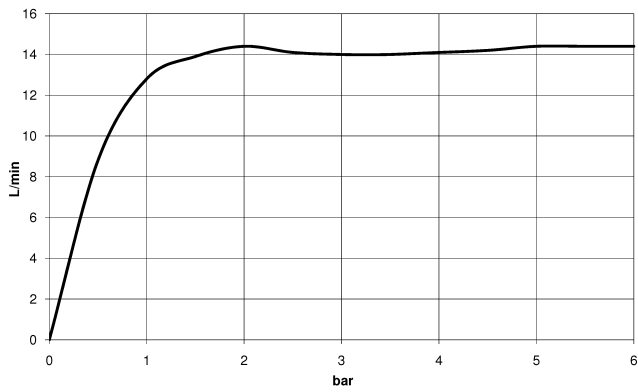

Hand shower set with integrated shower holder

27 802 970

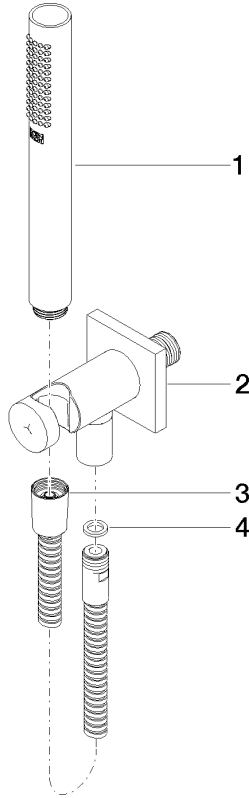

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-06	Hand shower	1	10
2	28 490 970-06	Wall elbow with integrated shower holder	1	10
3	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 1250 mm	1	10
4	09 14 20 026 90	seal	1	2

Concealed thermostat with two function volume control

36 426 670



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS: 1906098

	Brushed Platinum	36 426 670-06
	Chrome	36 426 670-00
	Platinum	36 426 670-08
	Dark Chrome	36 426 670-19
	Brushed Durabronze (23kt Gold)	36 426 670-28
	Matte Black	36 426 670-33
	Brushed Champagne (22kt Gold)	36 426 670-46
	Champagne (22kt Gold)	36 426 670-47
	Brushed Chrome	36 426 670-93
	Brushed Dark Platinum	36 426 670-99

Required miscellaneous



- Concealed thermostat with built-in isolators** 35 426 970 90
- min. recess depth 80 mm
 - max. recess depth 136 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction** 12 340 970 90

Required miscellaneous



- Concealed thermostat** 35 425 970 90
- min. recess depth 80 mm
 - max. recess depth 136 mm

Required miscellaneous




- xGRID Installation track 555 mm** 12 360 970 90


Concealed thermostat with two function volume control

36 426 670

mm [inches]

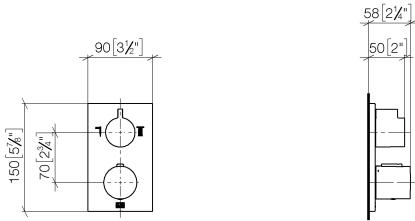


Flow rate chart

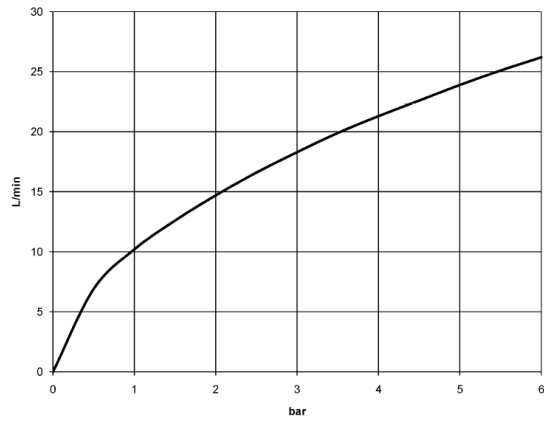

Concealed thermostat with two function volume control

36 426 670

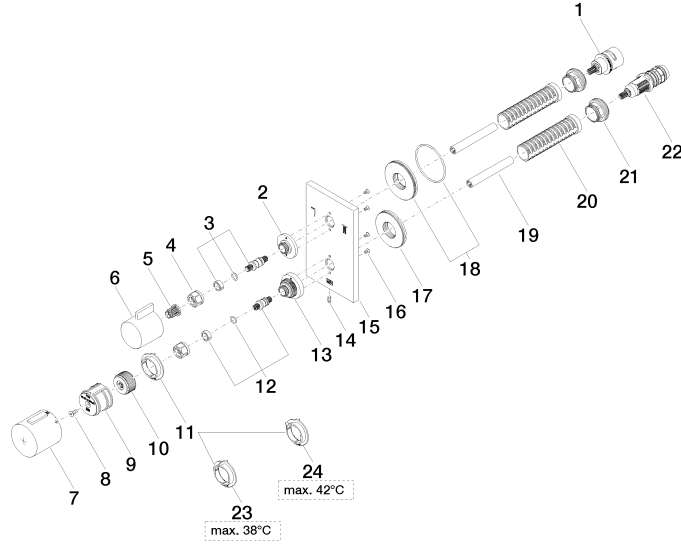



Concealed thermostat with two function volume control


36 426 670

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 90 03 163 00 90	diverter	1	2
2	09 12 12 053-06	base	1	10
3	04 29 06 111 00-00	spindle	1	60
4	09 23 30 023 90	nut	2	2
5	90 12 12 002 00 90	fixing cap	1	2
6	09 20 67 006-06	handle	1	10
7	90 17 33 017 00-06	handle	1	10
8	09 30 30 124 90	screw	1	2
9	09 12 12 052 90	base	1	2
10	09 12 12 054 90	base	1	2
11	09 28 10 187 90	regulator	1	2
12	04 29 06 024 00-00	spindle	1	60
13	09 12 12 051-06	base	1	10
14	09 31 11 134 90	pin	1	2
15	09 11 02 233-06	plate	1	10
16	09 30 30 157 90	screw	4	2
17	09 30 01 296 90	disc	1	2
18	90 30 01 190 00 90	disc	1	2
19	09 23 01 124 90	sleeve	2	2
20	09 18 40 077 90	sleeve	2	2
21	09 24 04 257 90	nut	2	2
22	90 15 02 013 00 90	cartridge	1	2
23	09 28 10 188 90	regulator	1	2
24	09 28 10 189 90	regulator	1	2

Concealed wall elbow

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

Recommended miscellaneous

Leak protection 1/2"


12 010 970 90



Concealed wall elbow

#Error


mm [inches]

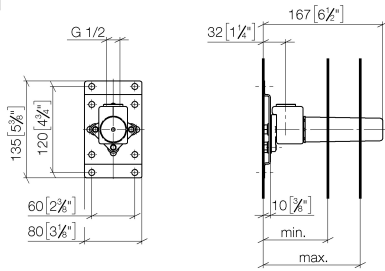

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

Concealed wall elbow

#Error

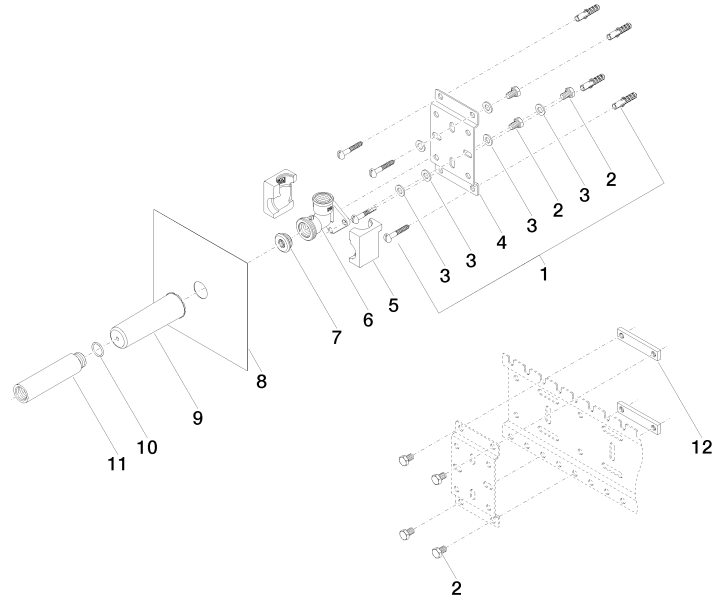


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2

Concealed thermostat

#Error



- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- suitable for xGRID (when using installation track + 12 mm recess depth)
- gauge 70 mm

Recommended miscellaneous



Drybox Concealed thermostat

- Overflow is part of the scope of delivery.

39 426 970 90

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction

12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm

12 360 970 90


Concealed thermostat

#Error

mm [inches]

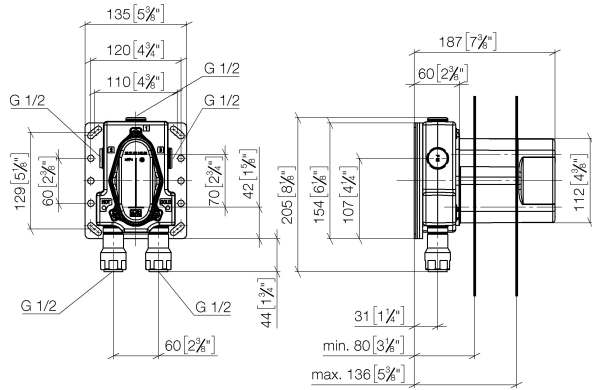


Flow rate chart

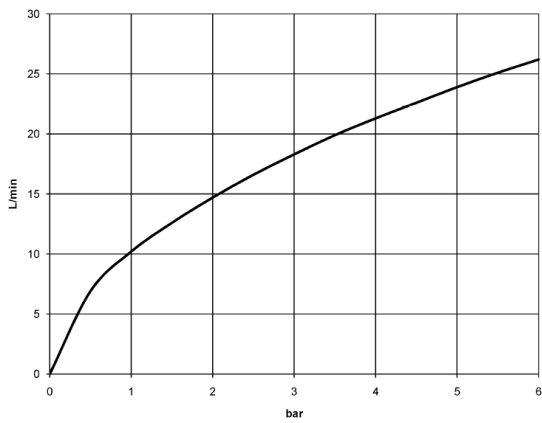

Concealed thermostat

#Error

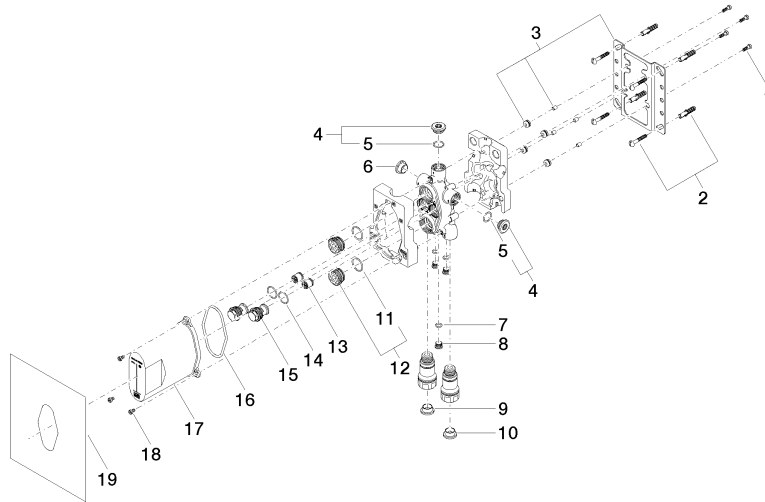


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 30 30 171 90	screw	4	2
2	04 30 31 024 01 90	fixing set	2	2
3	04 17 20 127 00 90	holder	1	2
4	04 31 20 006 00 90	plug	2	2
5	09 14 10 053 90	seal	1	2
6	09 31 20 092 90	plug	1	2
7	09 14 10 139 90	seal	3	2
8	09 31 20 039 10 90	plug	3	60
9	09 31 20 093 90	plug	1	2
10	09 31 20 094 90	plug	1	2
11	09 14 10 112 90	seal	2	2
12	04 30 11 149 00 90	plug	2	2
13	90 23 01 040 00 90	back-flow preventer	2	2
14	09 14 10 056 90	seal	2	2
15	09 24 03 219 90	nipple	2	2
16	09 14 10 512 90	seal	1	2
17	04 21 02 146 00 90	cap	1	2
18	09 30 30 112 90	screw	3	2
19	04 14 03 080 00 90	gasket kit	1	2

Drybox Concealed thermostat


#Error



- Dimensions 300 x 400 x 80 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

Drybox Concealed thermostat

#Error

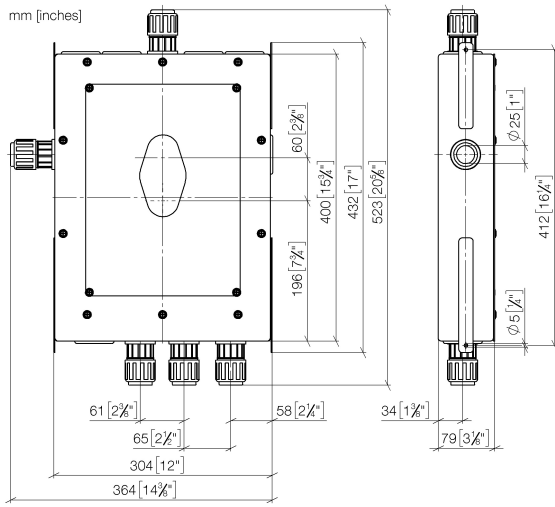

Leak protection 1/2"

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

Leak protection 1/2"

#Error

mm [inches]

