







Rain shower with wall fixing 300 mm

28 679 670



- 450 mm projection
- rain shower Ø 300 mm
- rain flow
- max. flow 14 l/min
- rosette 65 x 65 mm
- 1/2" connection
- with anti-scale system
- quick clearing
- WRAS: 1707033

	Brushed Platinum	28 679 670-06
	Chrome	28 679 670-00
	Platinum	28 679 670-08
	Brushed Durabronze (23kt Gold)	28 679 670-28
	Brushed Chrome	28 679 670-93
	Brushed Dark Platinum	28 679 670-99

Recommended miscellaneous




- Concealed wall elbow** 35 085 970 90
- min. recess depth 90 mm
 - max. recess depth 163 mm


Rain shower with wall fixing 300 mm

28 679 670

mm [inches]

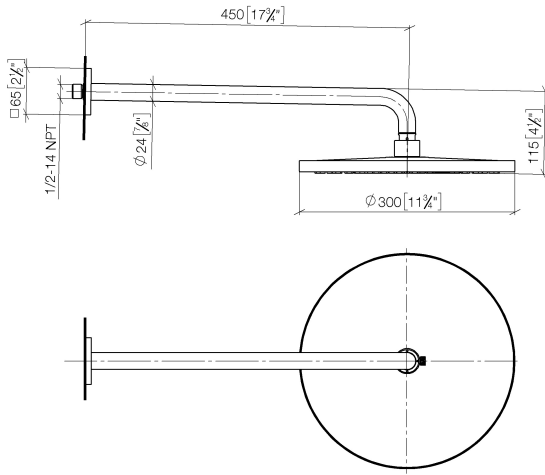


Flow rate chart

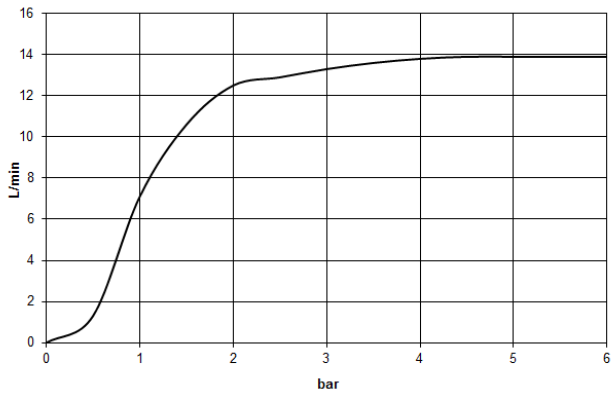

Rain shower with wall fixing 300 mm

28 679 670

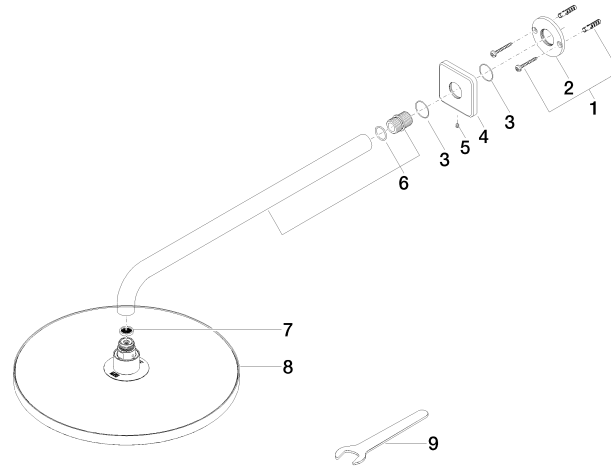

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 032 00 90	fixing set	1	2
2	09 17 20 120 90	holder	1	2
3	09 14 10 150 90	seal	2	2
4	09 27 67 015-06	rosette	1	10
5	09 31 11 038 90	pin	1	2
6	90 11 03 070 00-06	pipe	1	10
7	09 23 01 075 90	insert	1	2
8	04 12 05 091 00-06	shower	1	10
9	09 30 09 069 90	key	1	2

Hand shower set with integrated shower holder

27 802 970



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette 60 x 60 mm
- 1/2" connection
- max. flow 15 l/min
- WRAS: 1912049

Intrinsic protection against back flow.

	Brushed Platinum	27 802 970-06
	Chrome	27 802 970-00
	Chrome	27 802 970-00 0010
	Brushed Platinum	27 802 970-06 0010
	Platinum	27 802 970-08 0010
	Platinum	27 802 970-08
	Dark Chrome	27 802 970-19
	Dark Chrome	27 802 970-19 0010
	Brushed Durabronze (23kt Gold)	27 802 970-28 0010
	Brushed Durabronze (23kt Gold)	27 802 970-28
	Matte Black	27 802 970-33
	Matte Black	27 802 970-33 0010
	Brushed Champagne (22kt Gold)	27 802 970-46 0010
	Brushed Champagne (22kt Gold)	27 802 970-46
	Champagne (22kt Gold)	27 802 970-47
	Champagne (22kt Gold)	27 802 970-47 0010
	Brushed Chrome	27 802 970-93
	Brushed Chrome	27 802 970-93 0010
	Brushed Dark Platinum	27 802 970-99 0010
	Brushed Dark Platinum	27 802 970-99

Recommended miscellaneous



Concealed wall elbow


- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90


Hand shower set with integrated shower holder

27 802 970

mm [inches]

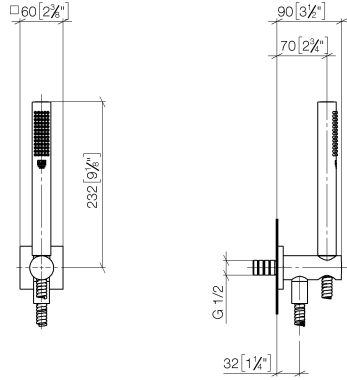


Flow rate chart

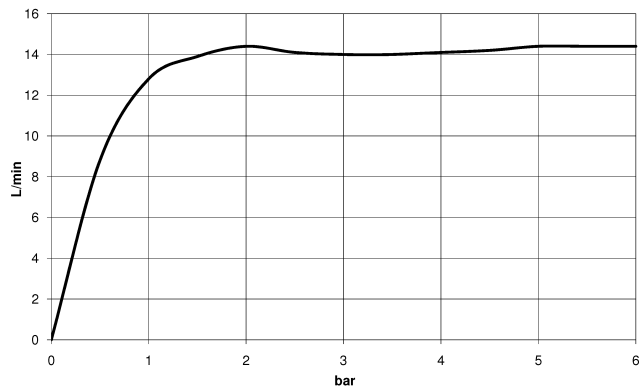

Hand shower set with integrated shower holder

27 802 970

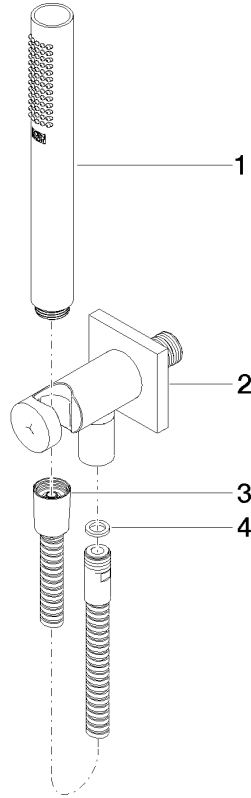

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-06	Hand shower	1	10
2	28 490 970-06	Wall elbow with integrated shower holder	1	10
3	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 1250 mm	1	10
4	09 14 20 026 90	seal	1	2

Wall valve clockwise closing 1/2"

36 607 782

- rosette 60 x 60 mm
- head part with cut-to-length spindle and sleeve



	Brushed Platinum	36 607 782-06
	Chrome	36 607 782-00
	Platinum	36 607 782-08
	Dark Chrome	36 607 782-19
	Brushed Durabronze (23kt Gold)	36 607 782-28
	Brushed Champagne (22kt Gold)	36 607 782-46
	Champagne (22kt Gold)	36 607 782-47
	Brushed Chrome	36 607 782-93
	Brushed Dark Platinum	36 607 782-99

Required miscellaneous



Wall valve 1/2"

35 607 970 90


- min. recess depth 105 mm
- max. recess depth 150 mm



Wall valve clockwise closing 1/2"


36 607 782

mm [inches]



Wall valve clockwise closing 1/2"

36 607 782

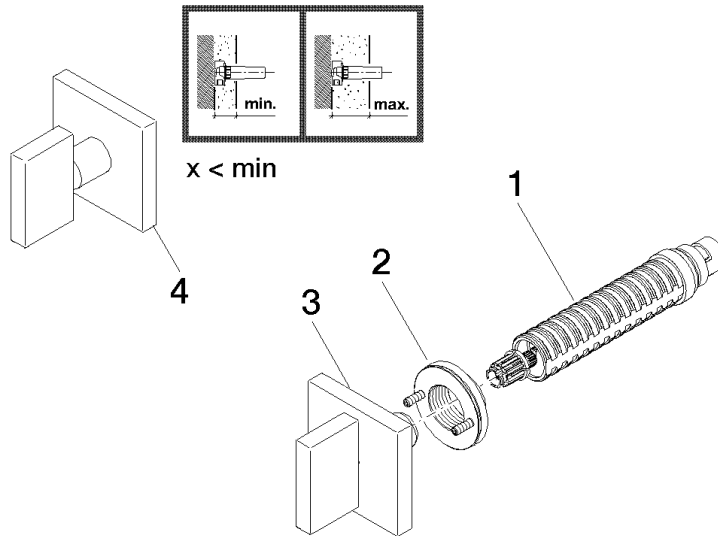

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 90 03 143 00 90	top	1	2
2	90 21 02 108 00 90	disc	1	2
3	90 20 78 002 02-06	handle	1	10
4	04 20 78 002 01-06	handle	1	10

xTOOL Concealed thermostat without volume control 3/4"

36 503 780



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

	Brushed Platinum	36 503 780-06
	Chrome	36 503 780-00
	Platinum	36 503 780-08
	Dark Chrome	36 503 780-19
	Brushed Durabronze (23kt Gold)	36 503 780-28
	Matte Black	36 503 780-33
	Brushed Champagne (22kt Gold)	36 503 780-46
	Champagne (22kt Gold)	36 503 780-47
	Brushed Chrome	36 503 780-93
	Brushed Dark Platinum	36 503 780-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control 35 503 970 90
 • min. recess depth 115 mm
 • max. recess depth 155 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction 12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm 12 360 970 90

xTOOL Concealed thermostat without volume control 3/4"


36 503 780

mm [inches]

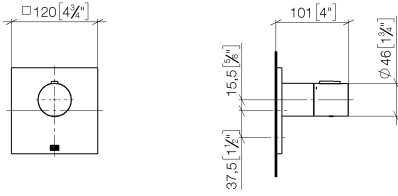

xTOOL Concealed thermostat without volume control 3/4"

36 503 780

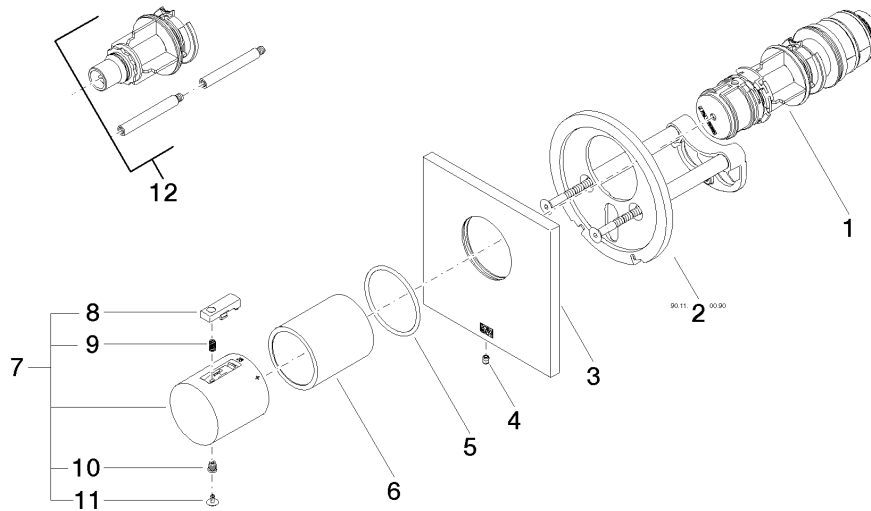

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 065 00 90	cartridge	1	2
2	90 11 01 196 00 90	base	1	2
3	09 11 02 533-06	cover	1	10
4	09 31 11 044 90	pin	1	2
5	09 14 10 049 90	seal	1	2
6	09 21 02 112-06	sleeve	1	10
7	90 17 33 004 00-06	handle	1	10
8	90 21 33 010 00-13	handle	1	2
9	90 16 02 027 00 90	spring	1	2
10	09 30 30 136 90	screw	1	2
11	09 31 20 049-13	plug	1	30
12	12 178 970 90	Extension 46 mm	1	2

Concealed wall elbow

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

Recommended miscellaneous

Leak protection 1/2"


12 010 970 90



Concealed wall elbow

#Error


mm [inches]

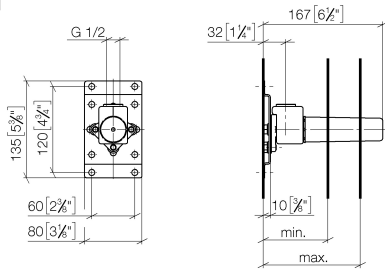

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

Concealed wall elbow

#Error

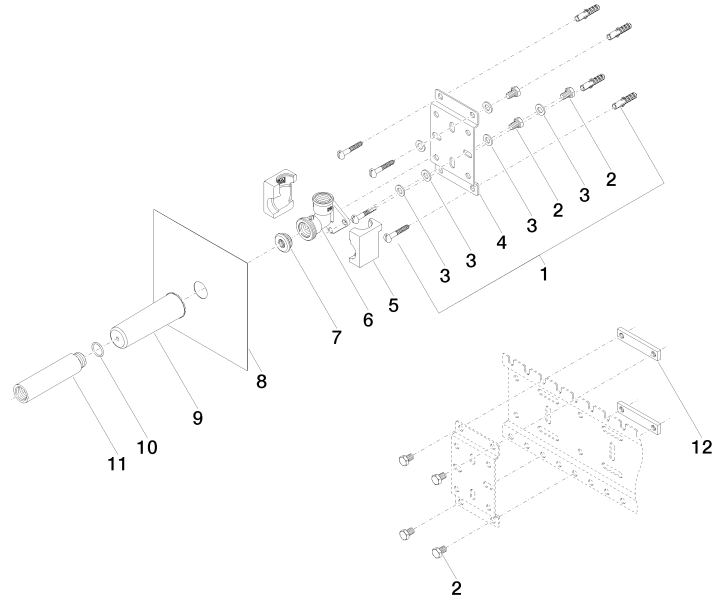


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2

xTOOL Concealed thermostat module with 2 valves

#Error



- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 2x female thread 3/4" outlet, right/left alternatively
- 3x dust cover
- 3x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)

Recommended miscellaneous

Extension 28 mm

12 177 970 90



Recommended miscellaneous

Extension 46 mm


12 178 970 90



Recommended miscellaneous

Drybox Thermostat module with 2 valves 39 521 970 90

- Overflow is part of the scope of delivery.



Recommended miscellaneous

xGRID Attachment set for integrating in the dry wall construction

12 340 970 90




Required miscellaneous

xGRID Installation track 555 mm 12 360 970 90




xTOOL Concealed thermostat module with 2 valves

#Error

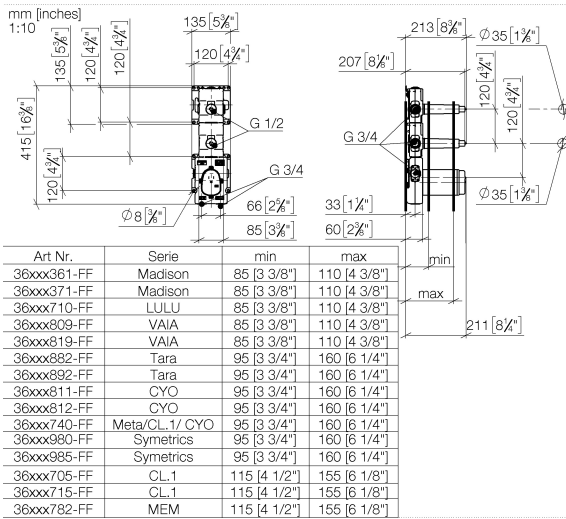


Flow rate chart

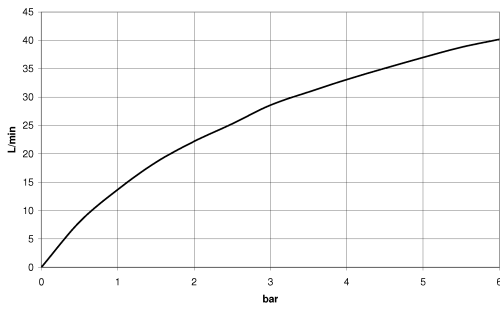

xTOOL Concealed thermostat module with 2 valves

#Error

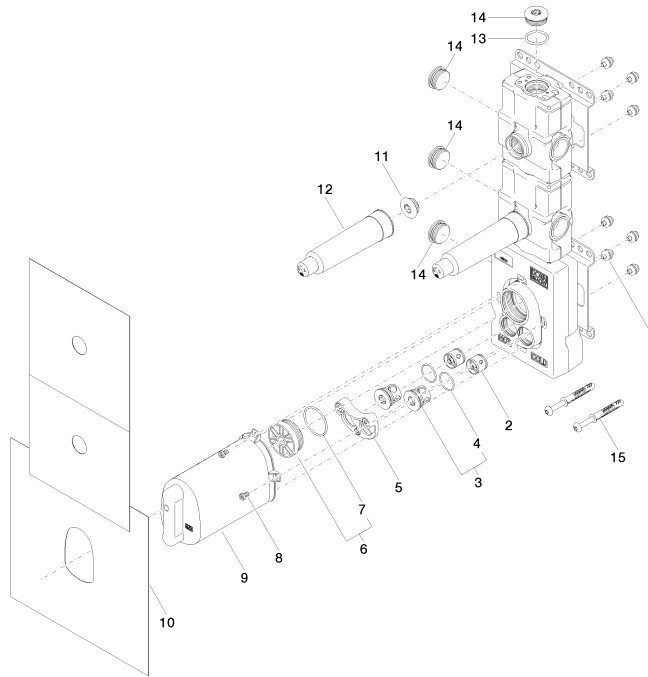


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 23 01 091 00 90	set	8	2
2	90 23 01 045 00 90	back-flow preventer	2	2
3	04 21 34 077 00 90	nipple	2	2
4	09 14 10 098 90	seal	2	2
5	90 12 12 218 00 90	base	1	2
6	04 31 20 100 00 90	plug	1	2
7	09 14 10 111 90	seal	1	2
8	09 30 30 112 90	screw	4	2
9	04 21 02 174 00 90	cap	1	60
10	04 14 03 073 02 90	gasket kit	1	60
11	04 31 20 006 00 90	plug	2	2
12	09 21 02 173 90	cap	2	2
13	09 14 10 009 90	seal	1	2
14	09 31 20 003 90	plug	4	2
15	04 30 31 054 00 90	fixing set	2	2

Drybox Thermostat module with 2 valves

#Error




- Dimensions 300 x 600 x 108 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

Drybox Thermostat module with 2 valves

#Error

mm [inches]
M 1:10

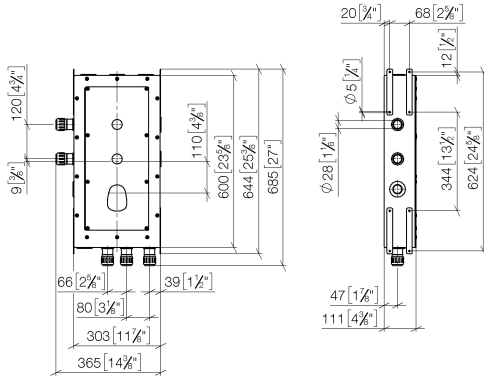

Leak protection 1/2"

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

Leak protection 1/2"

#Error

mm [inches]

