

### Wall-mounted single-lever basin mixer without pop-up waste

#### 36 860 660



- 190 mm projection
  - fixed spout
  - circular, air-enriched flow
  - hole diameter spout 37 mm
  - hole diameter single-lever mixer 57 mm
  - rosette for spout Ø 55mm • rosette for mixer Ø 78mm
  - max. flow 5.7 l/min
  - lead-free

  - This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Chrome	36 860 660-00
Brushed Platinum	36 860 660-06
Dark Chrome	36 860 660-19
Matte Black	36 860 660-33
Brushed Champagne (22kt Gold)	36 860 660-46
Champagne (22kt Gold)	36 860 660-47
Brushed Chrome	36 860 660-93

35 860 970 90

### Required miscellaneous



Concealed wall-mounted single-35 816 970 90 lever mixer mixer on right •NOTE:Not suitable for concealed installation.Connection by means of angle valves, mounted with screws to back wall.

### Required miscellaneous

Concealed wall-mounted singlelever mixer

•min. recess depth 80 mm


•max. recess depth 95 mm




# Wall-mounted single-lever basin mixer without pop-up waste

#### 36 860 660

mm [inches]




### Flow rate chart





# Wall-mounted single-lever basin mixer without pop-up waste

36 860 660

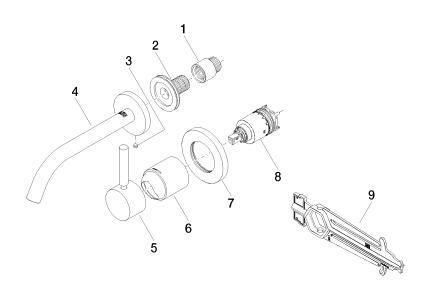

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 24 03 072 10 90	nipple	1	2
2	90 24 03 280 00 90	nipple	1	2
3	09 31 11 112 90	pin	1	60
4	90 28 22 323 00-00	spout	1	10
5	90 20 66 007 00-00	handle	1	10
6	09 11 02 288-00	cover	1	10
7	90 27 62 011 00-00	rosette	1	10
8	90 15 05 064 01 90	cartridge	1	2
9	09 30 09 064 90	key	1	2



### Concealed wall-mounted single-lever mixer

#### #Error

- 2x female thread 1/2" connections
- 1x female thread 1/2" outlet for wall spout
  1x female thread 1/2" outlet
- 2x dust cover anti-water packing
- anti-water packing
- soundproofinggauge 100 mm

### Required miscellaneous



Drybox Wall-mounted single-lever 39 807 970 90 basin mixer Mixer on right/left/or above •Overflow is part of the scope of

### Recommended miscellaneous



Extension 20 mm 12 869 970 90 •Can only be combined with exposed trim parts 36 86X SSS-FF.

### Recommended miscellaneous

	Adapter for reversed water	12 880 970 90
C	<ul> <li>connections</li> <li>●Not suitable for combining with META PURE (36 86X 664-FF).</li> </ul>	

### Recommended miscellaneous


delivery.

	Extension 20 mm	12 870 970 90
	<ul> <li>Can only be combined with</li> </ul>	
Ø	exposed trim parts 36 86X 664-FF.	




## Concealed wall-mounted single-lever mixer

#### #Error




### Flow rate chart





# Concealed wall-mounted single-lever mixer

#Error

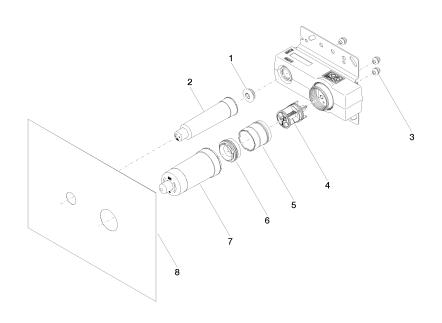

# Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 31 20 006 00 90	plug	1	2
2	09 21 02 173 90	сар	1	2
3	90 23 01 091 00 90	set	3	2
4	90 31 20 107 00 90	plug	1	2
5	90 17 01 238 00 90	sleeve	1	2
6	90 24 04 349 00 90	threaded connector	1	2
7	09 21 02 176 90	сар	1	60
8	04 14 03 074 00 90	gasket kit	1	60




# Drybox Wall-mounted single-lever basin mixer Mixer on right/left/or above

#Error

- Dimensions 300 x 300 x 80 mm
- brushed stainless steel cover
  stainless steel casing
- Overflow is part of the scope of delivery.

12 869 970 90



Extension 20 mm

m

Evt

Ø

Extension 20 mm

Required miscellaneous

12 870 970 90





# Drybox Wall-mounted single-lever basin mixer Mixer on right/left/or above

#Error

