

Shower head

28 504 979



- 180-210 mm projection
- ball-joint pivotable through 30°
- normal flow
- with anti-scale system
- spray head Ø 100mm
- rosette Ø 55 mm
- 1/2" connection
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Platinum	28 504 979-06
	Chrome	28 504 979-00
	Platinum	28 504 979-08
	Matte White	28 504 979-10
	Dark Chrome	28 504 979-19
	Brushed Durabrass (23kt Gold)	28 504 979-28
	Matte Black	28 504 979-33
	Brushed Champagne (22kt Gold)	28 504 979-46
	Champagne (22kt Gold)	28 504 979-47
	Brushed Chrome	28 504 979-93
	Brushed Dark Platinum	28 504 979-99

Recommended miscellaneous



Concealed wall elbow


35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm


Shower head

28 504 979

mm [inches]

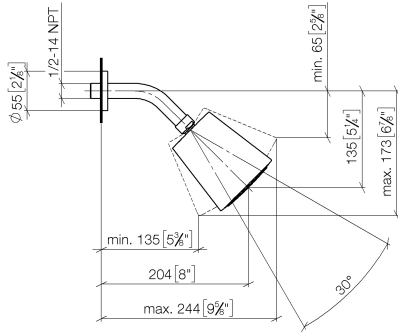


Flow rate chart

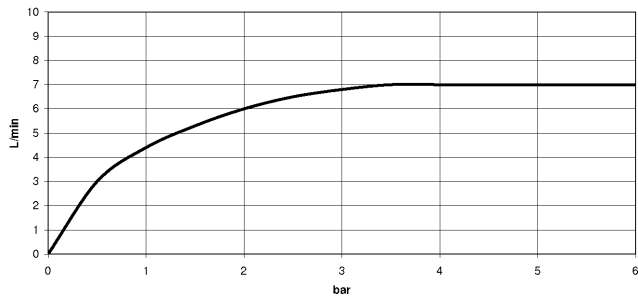

Shower head

28 504 979

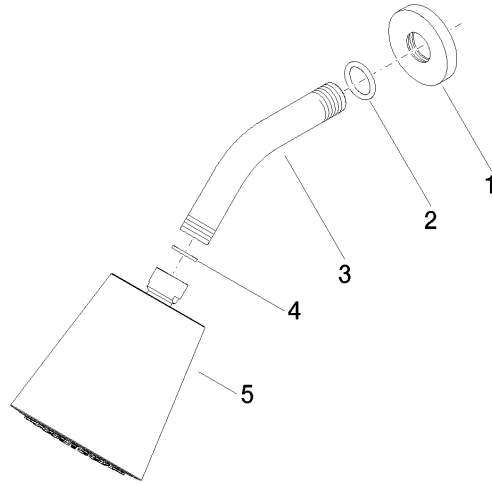

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 22 003-06	rosette	1	10
2	09 14 10 026 90	seal	1	2
3	09 11 03 011-06	connection	1	10
4	09 14 20 002 90	seal	1	60
5	90 12 05 054 00-06	shower	1	10

Hand shower set with integrated shower holder

27 802 660



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette Ø 60 mm
- 1/2" connection
- max. flow 15 l/min
- WRAS: 1912049

Intrinsic protection against back flow.

	Brushed Platinum	27 802 660-06
	Chrome	27 802 660-00 0010
	Chrome	27 802 660-00
	Brushed Platinum	27 802 660-06 0010
	Platinum	27 802 660-08
	Platinum	27 802 660-08 0010
	Matte White	27 802 660-10
	Matte White	27 802 660-10 0010
	Dark Chrome	27 802 660-19
	Dark Chrome	27 802 660-19 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28
	Matte Black	27 802 660-33 0010
	Matte Black	27 802 660-33
	Brushed Champagne (22kt Gold)	27 802 660-46
	Brushed Champagne (22kt Gold)	27 802 660-46 0010
	Champagne (22kt Gold)	27 802 660-47
	Champagne (22kt Gold)	27 802 660-47 0010
	Brushed Chrome	27 802 660-93
	Brushed Chrome	27 802 660-93 0010
	Brushed Dark Platinum	27 802 660-99
	Brushed Dark Platinum	27 802 660-99 0010

Hand shower set with integrated shower holder

27 802 660

Recommended miscellaneous



Concealed wall elbow


- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90


Hand shower set with integrated shower holder

27 802 660

mm [inches]

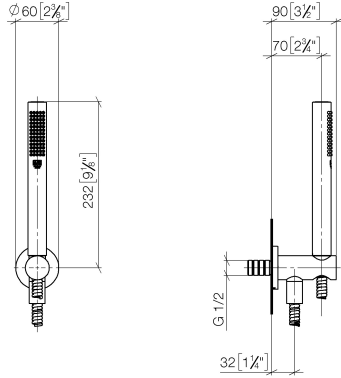


Flow rate chart

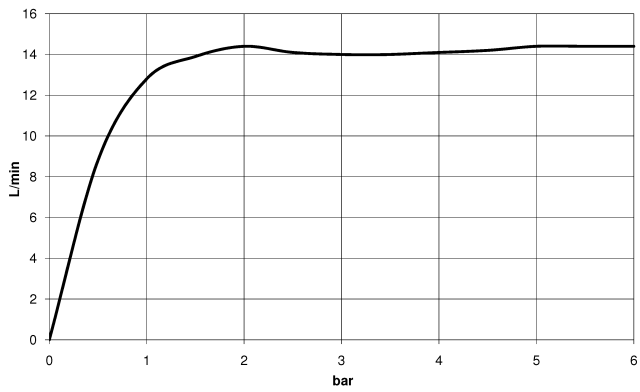

Hand shower set with integrated shower holder

27 802 660

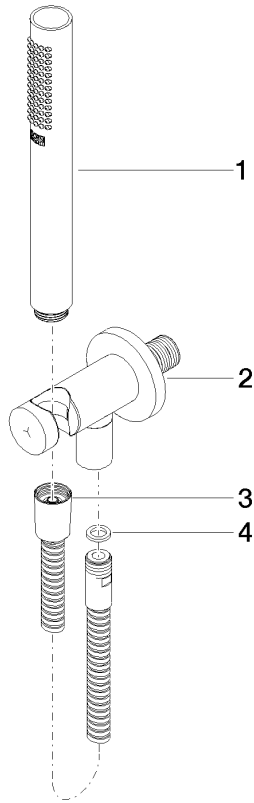

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-06	Hand shower	1	10
2	28 490 660-06	Wall elbow with integrated shower holder	1	10
3	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 1250 mm	1	10
4	09 14 20 026 90	seal	1	2

Concealed single-lever mixer with diverter

36 120 660



- automatic diverter
- cover plate Ø 150 mm

	Brushed Platinum	36 120 660-06
	Chrome	36 120 660-00
	Platinum	36 120 660-08
	Matte White	36 120 660-10
	Dark Chrome	36 120 660-19
	Brushed Durabronze (23kt Gold)	36 120 660-28
	Matte Black	36 120 660-33
	Brushed Champagne (22kt Gold)	36 120 660-46
	Champagne (22kt Gold)	36 120 660-47
	Brushed Chrome	36 120 660-93
	Brushed Dark Platinum	36 120 660-99

Required miscellaneous



- Concealed single-lever mixer with backflow preventor** 35 021 970 90
- min. recess depth 80 mm
 - max. recess depth 105 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction** 12 340 970 90

Required miscellaneous



- Concealed single-lever mixer** 35 020 970 90
- min. recess depth 80 mm
 - max. recess depth 105 mm

Required miscellaneous




- xGRID Installation track 555 mm** 12 360 970 90


Concealed single-lever mixer with diverter

36 120 660

mm [inches]

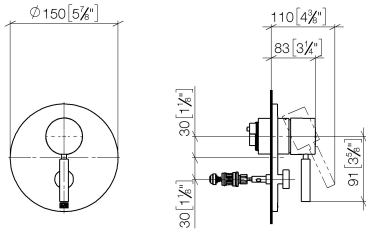


Flow rate chart

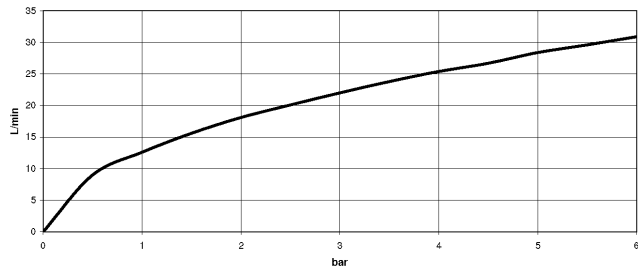

Concealed single-lever mixer with diverter

36 120 660

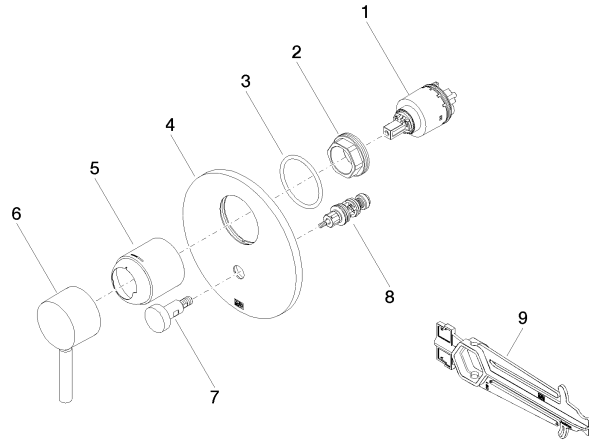


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 05 039 00 90	cartridge	1	2
2	09 24 04 448 90	nut	1	2
3	09 14 10 084 90	seal	1	2
4	09 11 02 261-06	plate	1	10
5	09 11 02 260-06	sleeve	1	10
6	90 20 66 004 00-06	handle	1	10
7	90 31 09 139 00-06	pull-rod	1	10
8	90 21 34 081 00 90	diverter	1	2
9	09 30 09 064 90	key	1	2

Concealed single-lever mixer

#Error



- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- 2x integrated supply stop
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 60 mm
- WRAS: 2207012

Recommended miscellaneous

Extension 25 mm

12 191 970 90



Recommended miscellaneous

Extension 25 mm

12 190 970 90



Recommended miscellaneous



Drybox Concealed single-lever mixer with and without diverter
 • Overflow is part of the scope of delivery.

39 121 970 90

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction

12 340 970 90

Required miscellaneous

xGRID Installation track 555 mm


12 360 970 90




Concealed single-lever mixer

#Error

mm [inches]

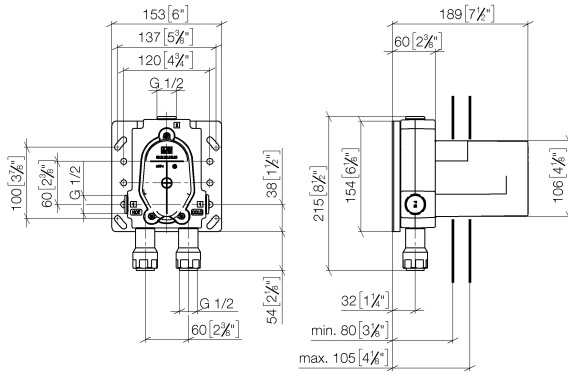


Flow rate chart

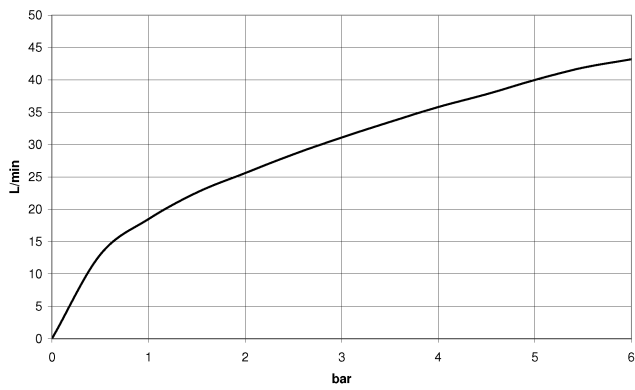

Concealed single-lever mixer

#Error

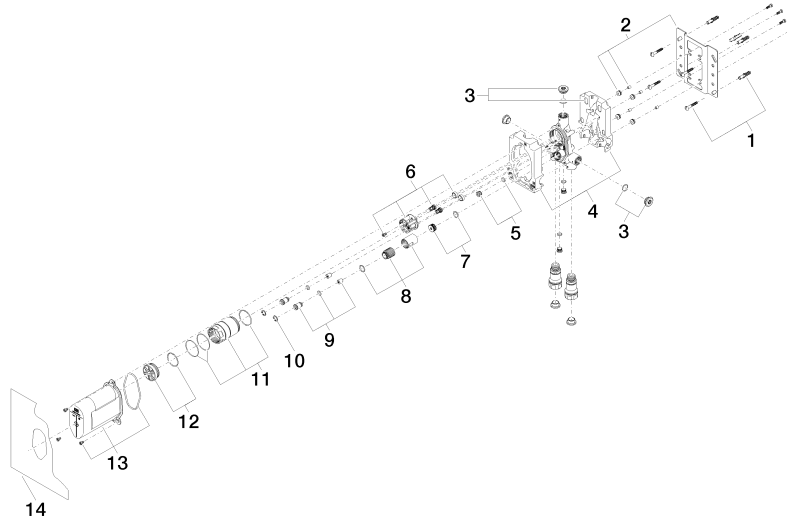


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	04 17 20 128 00 90	holder	1	2
3	04 31 20 006 00 90	plug	2	2
4	09 11 11 058 90	accessories	1	2
5	04 31 20 039 10 90	plug	1	2
6	90 18 40 151 00 90	insert	1	2
7	90 31 20 098 00 90	plug	1	2
8	90 17 01 189 00 90	sleeve	1	2
9	04 24 03 223 00 90	insert	2	2
10	09 16 01 014 90	ring	2	2
11	90 17 01 187 00 90	sleeve	1	2
12	04 31 20 100 00 90	plug	1	2
13	90 21 02 148 00 90	cap	1	2
14	04 14 03 155 00 90	gasket kit	1	2

Drybox Concealed single-lever mixer with and without diverter


#Error



- Dimensions 300 x 400 x 80 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

Drybox Concealed single-lever mixer with and without diverter

#Error

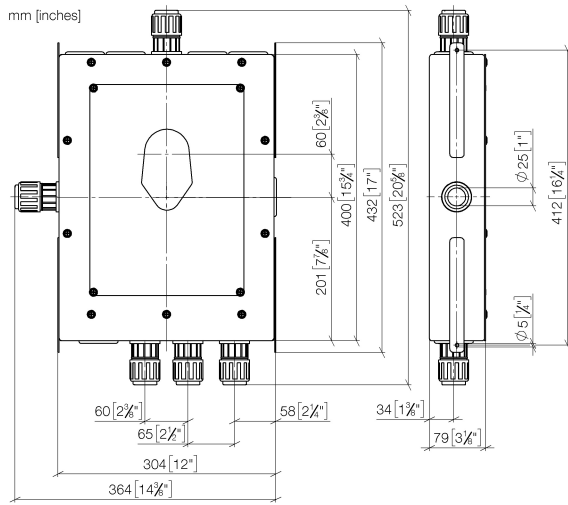

Concealed wall elbow

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

Recommended miscellaneous

Leak protection 1/2"


12 010 970 90



Concealed wall elbow

#Error


mm [inches]

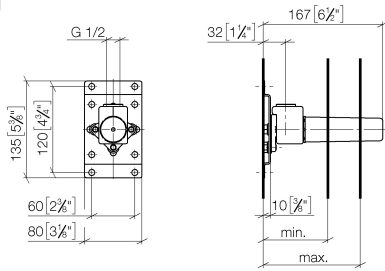

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

Concealed wall elbow

#Error

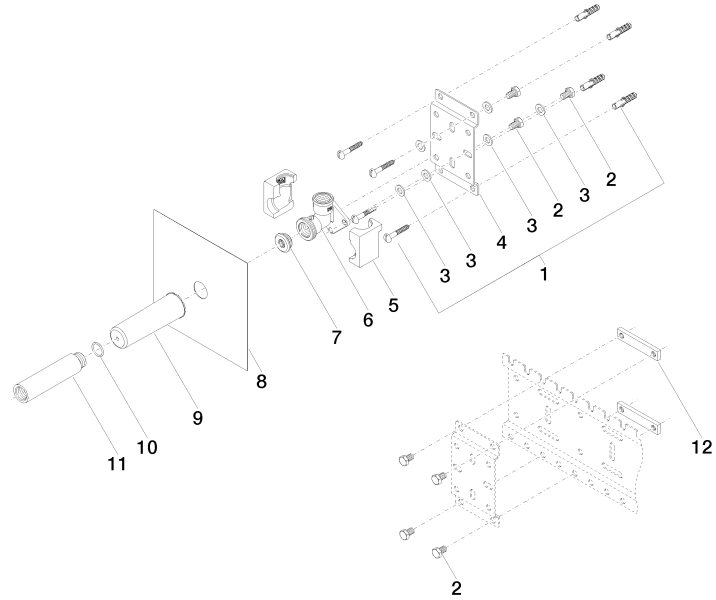

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2

Leak protection 1/2"

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

Leak protection 1/2"

#Error

mm [inches]

