

## Hand shower set with integrated shower holder

27 802 660



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette Ø 60 mm
- 1/2" connection
- WRAS: 1912049

Intrinsic protection against back flow.

	Brushed Dark Platinum	27 802 660-99
	Chrome	27 802 660-00 0010
	Chrome	27 802 660-00
	Brushed Platinum	27 802 660-06 0010
	Brushed Platinum	27 802 660-06
	Platinum	27 802 660-08
	Platinum	27 802 660-08 0010
	Matte White	27 802 660-10
	Matte White	27 802 660-10 0010
	Dark Chrome	27 802 660-19
	Dark Chrome	27 802 660-19 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28
	Matte Black	27 802 660-33 0010
	Matte Black	27 802 660-33
	Brushed Champagne (22kt Gold)	27 802 660-46
	Brushed Champagne (22kt Gold)	27 802 660-46 0010
	Champagne (22kt Gold)	27 802 660-47
	Champagne (22kt Gold)	27 802 660-47 0010
	Brushed Chrome	27 802 660-93
	Brushed Chrome	27 802 660-93 0010
	Brushed Dark Platinum	27 802 660-99 0010

## Hand shower set with integrated shower holder

---

27 802 660

### Recommended miscellaneous

---



**Concealed wall elbow**


- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90


## Hand shower set with integrated shower holder

27 802 660

mm [inches]

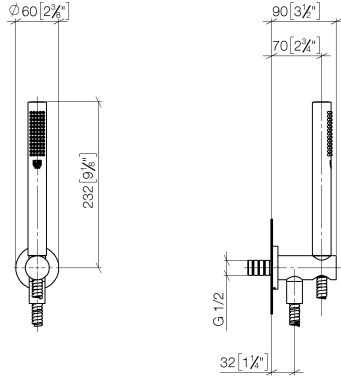


### Flow rate chart

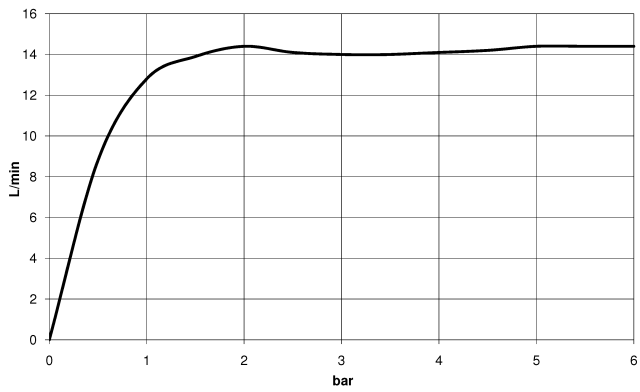

## Hand shower set with integrated shower holder

27 802 660

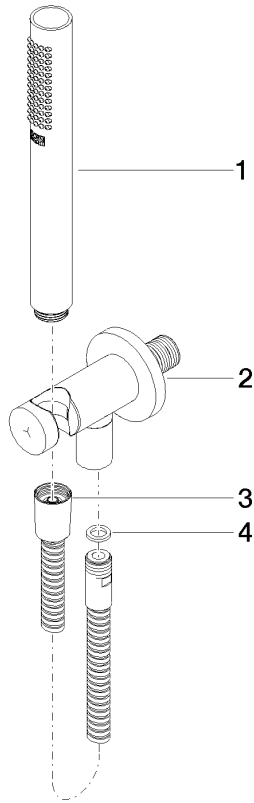

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-99	Hand shower	1	30
2	28 490 660-99	Wall elbow with integrated shower holder	1	30
3	90 30 02 072 00-99	Metal shower hose 1/2" x 3/8" x 1250 mm	1	30
4	09 14 20 026 90	seal	1	2

## Rain shower with wall fixing 220 mm

28 649 970



- 450 mm projection
- rain shower Ø 220 mm
- rain flow
- rosette Ø 60 mm
- 1/2" connection
- with anti-scale system
- quick clearing
- WRAS: 1707033
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Dark Platinum	28 649 970-99
	Chrome	28 649 970-00
	Brushed Platinum	28 649 970-06
	Platinum	28 649 970-08
	Matte White	28 649 970-10
	Dark Chrome	28 649 970-19
	Brushed Durabronze (23kt Gold)	28 649 970-28
	Matte Black	28 649 970-33
	Brushed Champagne (22kt Gold)	28 649 970-46
	Champagne (22kt Gold)	28 649 970-47
	Brushed Chrome	28 649 970-93

## Recommended miscellaneous



### Concealed wall elbow


35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm


## Rain shower with wall fixing 220 mm

28 649 970

mm [inches]

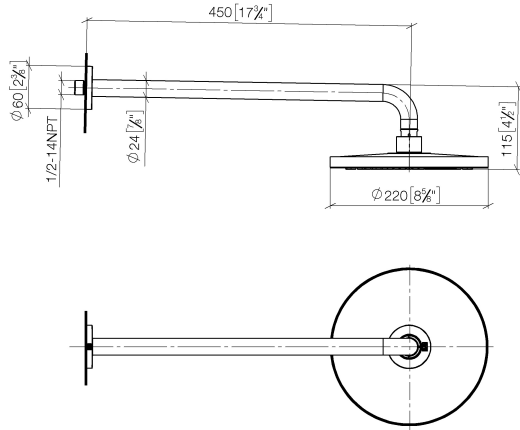


### Flow rate chart

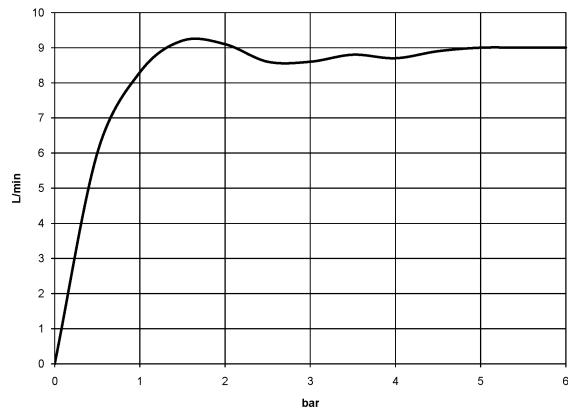

## Rain shower with wall fixing 220 mm

28 649 970

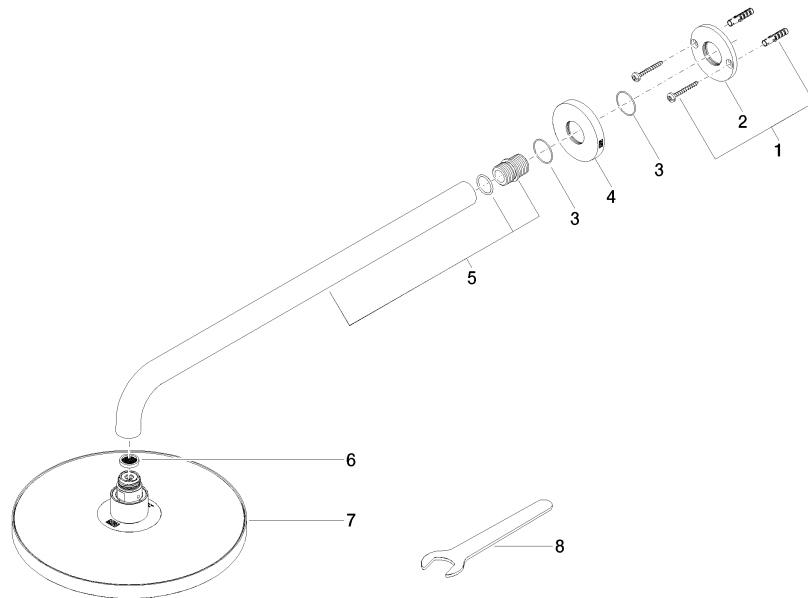

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 032 00 90	fixing set	1	2
2	09 17 20 120 90	holder	1	2
3	09 14 10 150 90	seal	2	2
4	09 27 97 015-99	rosette	1	30
5	90 11 03 070 00-99	pipe	1	30
6	09 23 01 075 90	insert	1	2
7	04 12 05 092 00-99	shower	1	30
8	09 30 09 069 90	key	1	2

## Concealed thermostat with two function volume control

36 426 970



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS: 1906098

	Brushed Dark Platinum	36 426 970-99
	Chrome	36 426 970-00
	Brushed Platinum	36 426 970-06
	Platinum	36 426 970-08
	Matte White	36 426 970-10
	Dark Chrome	36 426 970-19
	Brushed Durabrace (23kt Gold)	36 426 970-28
	Matte Black	36 426 970-33
	Brushed Champagne (22kt Gold)	36 426 970-46
	Champagne (22kt Gold)	36 426 970-47
	Brushed Chrome	36 426 970-93

### Required miscellaneous



- Concealed thermostat with built-in isolators** 35 426 970 90
- min. recess depth 80 mm
  - max. recess depth 136 mm

### Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction** 12 340 970 90

### Required miscellaneous



- Concealed thermostat** 35 425 970 90
- min. recess depth 80 mm
  - max. recess depth 136 mm

### Required miscellaneous




- xGRID Installation track 555 mm** 12 360 970 90




## Concealed thermostat with two function volume control

36 426 970

mm [inches]

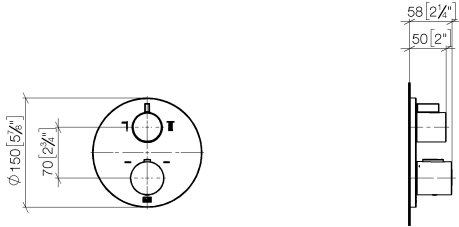


### Flow rate chart

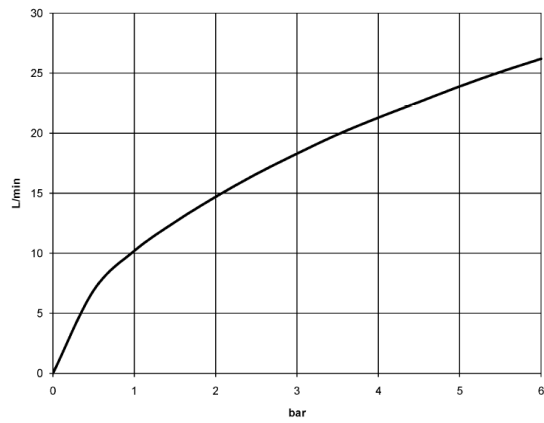

## Concealed thermostat with two function volume control

36 426 970

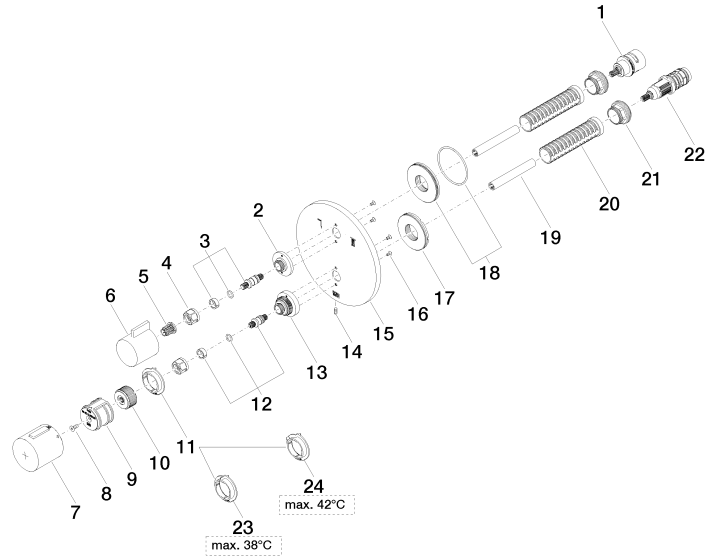



## Concealed thermostat with two function volume control


36 426 970

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 90 03 163 00 90	diverter	1	2
2	09 12 12 053-99	base	1	30
3	04 29 06 111 00-00	spindle	1	60
4	09 23 30 023 90	nut	2	2
5	90 12 12 002 00 90	fixing cap	1	2
6	09 20 67 006-99	handle	1	30
7	90 17 33 017 00-99	handle	1	30
8	09 30 30 124 90	screw	1	2
9	09 12 12 052 90	base	1	2
10	09 12 12 054 90	base	1	2
11	09 28 10 187 90	regulator	1	2
12	04 29 06 024 00-00	spindle	1	60
13	09 12 12 051-99	base	1	30
14	09 31 11 134 90	pin	1	2
15	09 11 02 243-99	plate	1	30
16	09 30 30 157 90	screw	4	2
17	09 30 01 296 90	disc	1	2
18	90 30 01 190 00 90	disc	1	2
19	09 23 01 124 90	sleeve	2	2
20	09 18 40 077 90	sleeve	2	2
21	09 24 04 257 90	nut	2	2
22	90 15 02 013 00 90	cartridge	1	2
23	09 28 10 188 90	regulator	1	2
24	09 28 10 189 90	regulator	1	2

## Concealed single-lever mixer

#Error



- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- 2x integrated supply stop
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 60 mm
- WRAS: 2207012

### Recommended miscellaneous

**Extension 25 mm**

12 191 970 90



### Recommended miscellaneous

**Extension 25 mm**

12 190 970 90



### Recommended miscellaneous



**Drybox Concealed single-lever mixer with and without diverter**  
 • Overflow is part of the scope of delivery.

39 121 970 90

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction**

12 340 970 90

### Required miscellaneous

**xGRID Installation track 555 mm**


12 360 970 90




## Concealed single-lever mixer

#Error

mm [inches]

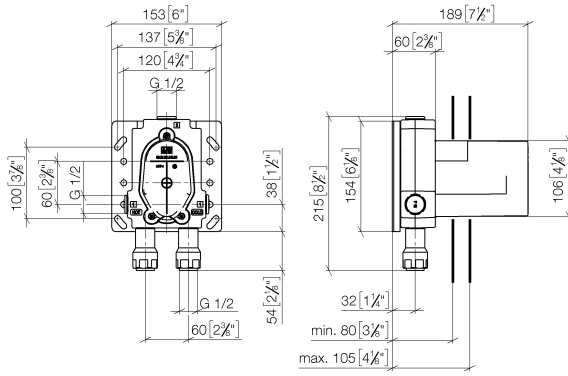


## Flow rate chart

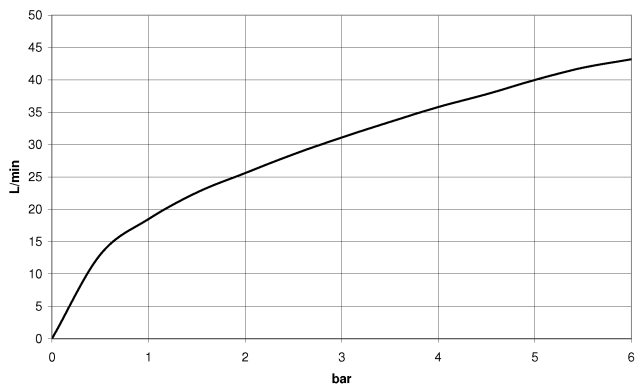

## Concealed single-lever mixer

#Error

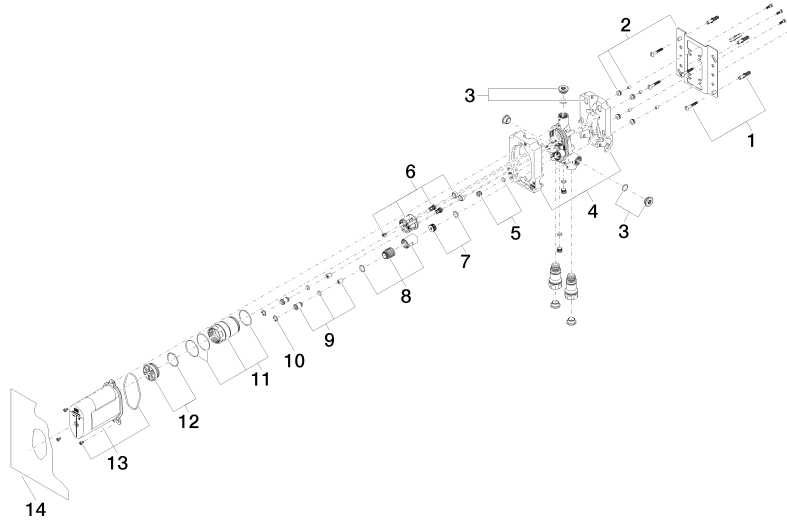

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	04 17 20 128 00 90	holder	1	2
3	04 31 20 006 00 90	plug	2	2
4	09 11 11 058 90	accessories	1	2
5	04 31 20 039 10 90	plug	1	2
6	90 18 40 151 00 90	insert	1	2
7	90 31 20 098 00 90	plug	1	2
8	90 17 01 189 00 90	sleeve	1	2
9	04 24 03 223 00 90	insert	2	2
10	09 16 01 014 90	ring	2	2
11	90 17 01 187 00 90	sleeve	1	2
12	04 31 20 100 00 90	plug	1	2
13	90 21 02 148 00 90	cap	1	2
14	04 14 03 155 00 90	gasket kit	1	2

## Drybox Concealed single-lever mixer with and without diverter

---


#Error



- Dimensions 300 x 400 x 80 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

**Drybox Concealed single-lever mixer with and without diverter**

#Error

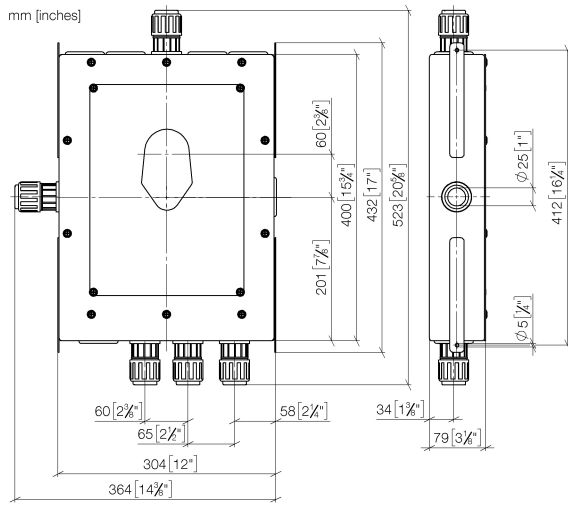



## Concealed wall elbow

---

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

## Recommended miscellaneous

---

**Leak protection 1/2"**


12 010 970 90



## Concealed wall elbow

#Error


mm [inches]

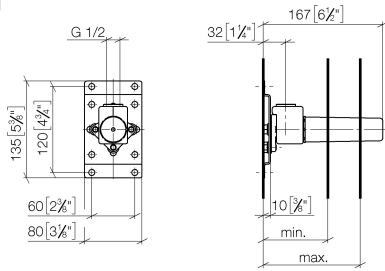

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

## Concealed wall elbow

#Error

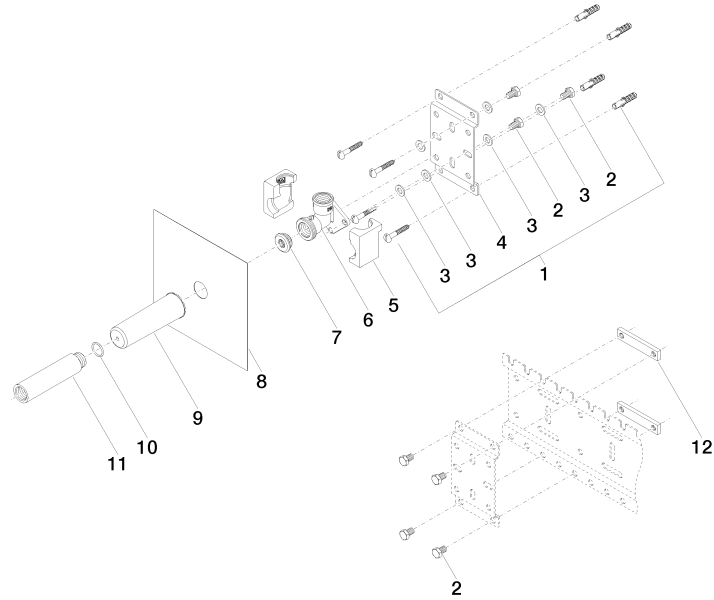

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2

## Leak protection 1/2"

---

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

## Leak protection 1/2"

---

#Error

mm [inches]

