

## Rain shower with wall fixing 300 mm

28 679 970



- 450 mm projection
- rain shower Ø 300 mm
- rain flow
- rosette Ø 60 mm
- 1/2" connection
- with anti-scale system
- quick clearing
- WRAS: 1707033
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Chrome	28 679 970-00
	Brushed Platinum	28 679 970-06
	Platinum	28 679 970-08
	Matte White	28 679 970-10
	Dark Chrome	28 679 970-19
	Brushed Durabronze (23kt Gold)	28 679 970-28
	Matte Black	28 679 970-33
	Brushed Champagne (22kt Gold)	28 679 970-46
	Champagne (22kt Gold)	28 679 970-47
	Brushed Chrome	28 679 970-93
	Brushed Dark Platinum	28 679 970-99

## Recommended miscellaneous



### Concealed wall elbow



35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm


## Rain shower with wall fixing 300 mm

28 679 970

mm [inches]

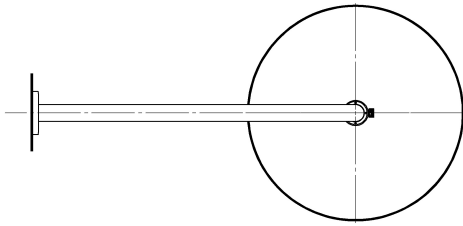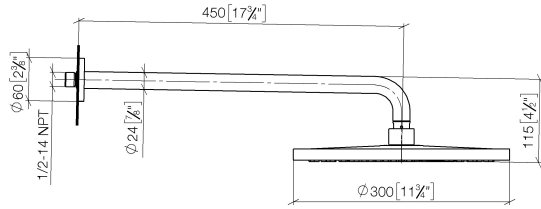


## Flow rate chart

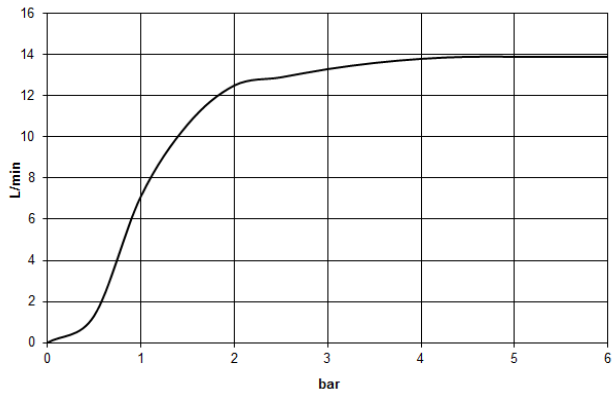

## Rain shower with wall fixing 300 mm

28 679 970

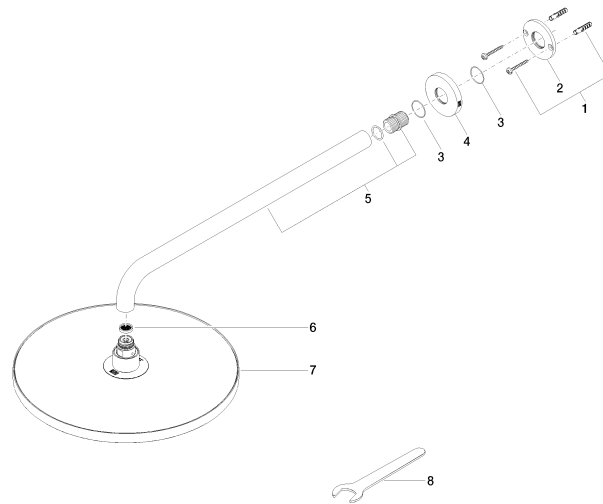

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 032 00 90	fixing set	1	2
2	09 17 20 120 90	holder	1	2
3	09 14 10 150 90	seal	2	2
4	09 27 97 015-00	rosette	1	10
5	90 11 03 070 00-00	pipe	1	10
6	09 23 01 075 90	insert	1	2
7	04 12 05 091 00-00	shower	1	10
8	09 30 09 069 90	key	1	2

## Hand shower set with integrated shower holder

27 802 660



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette Ø 60 mm
- 1/2" connection
- WRAS: 1912049

Intrinsic protection against back flow.

	Chrome	27 802 660-00
	Chrome	27 802 660-00 0010
	Brushed Platinum	27 802 660-06 0010
	Brushed Platinum	27 802 660-06
	Platinum	27 802 660-08
	Platinum	27 802 660-08 0010
	Matte White	27 802 660-10
	Matte White	27 802 660-10 0010
	Dark Chrome	27 802 660-19
	Dark Chrome	27 802 660-19 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28
	Matte Black	27 802 660-33 0010
	Matte Black	27 802 660-33
	Brushed Champagne (22kt Gold)	27 802 660-46
	Brushed Champagne (22kt Gold)	27 802 660-46 0010
	Champagne (22kt Gold)	27 802 660-47
	Champagne (22kt Gold)	27 802 660-47 0010
	Brushed Chrome	27 802 660-93
	Brushed Chrome	27 802 660-93 0010
	Brushed Dark Platinum	27 802 660-99
	Brushed Dark Platinum	27 802 660-99 0010

## Hand shower set with integrated shower holder

---

27 802 660

### Recommended miscellaneous

---



**Concealed wall elbow**


- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90


## Hand shower set with integrated shower holder

27 802 660

mm [inches]

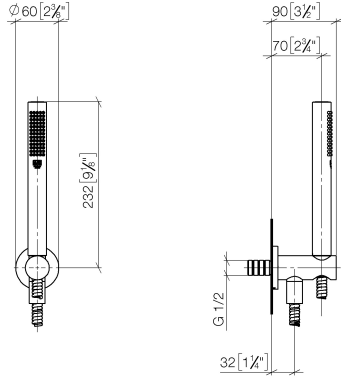


### Flow rate chart

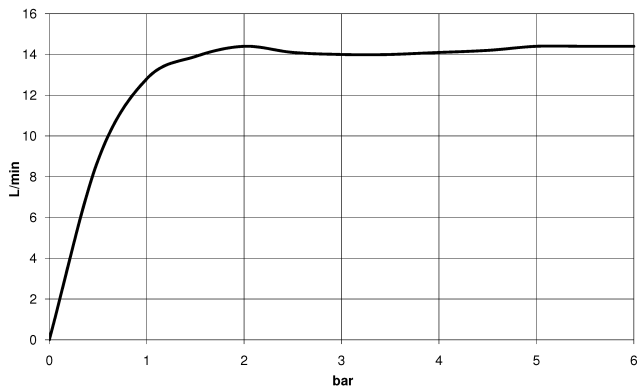

## Hand shower set with integrated shower holder

27 802 660

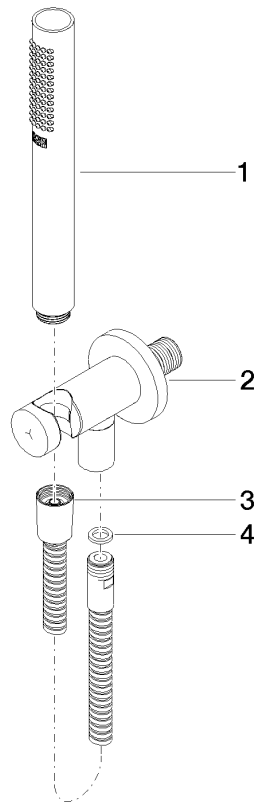

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-00	Hand shower	1	2
2	28 490 660-00	Wall elbow with integrated shower holder	1	10
3	90 30 02 072 00-00	Metal shower hose 1/2" x 3/8" x 1250 mm	1	10
4	09 14 20 026 90	seal	1	2

**Wall valve clockwise closing 1/2"**

36 607 740



- without rosette
- handle Ø 60mm
- without marking
- head part with cut-to-length spindle and sleeve

	Chrome	36 607 740-00
	Brushed Platinum	36 607 740-06
	Dark Chrome	36 607 740-19
	Brushed Durabronze (23kt Gold)	36 607 740-28
	Matte Black	36 607 740-33
	Brushed Champagne (22kt Gold)	36 607 740-46
	Champagne (22kt Gold)	36 607 740-47
	Brushed Chrome	36 607 740-93
	Brushed Dark Platinum	36 607 740-99

**Required miscellaneous**



**Wall valve 1/2"**

35 607 970 90

- min. recess depth 85 mm
- max. recess depth 145 mm





## Wall valve clockwise closing 1/2"

---


36 607 740

mm [inches]



Wall valve clockwise closing 1/2"

36 607 740

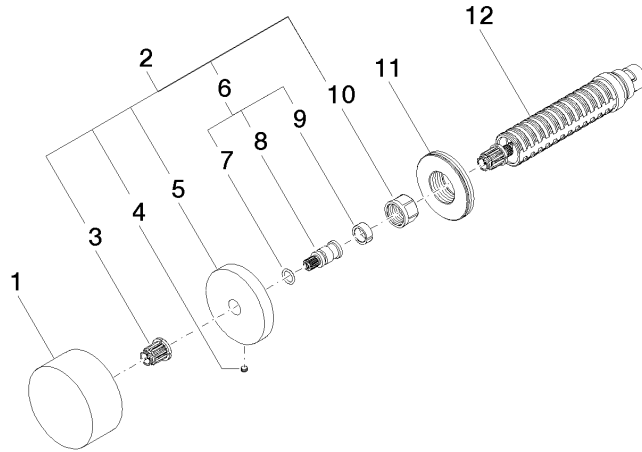

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 20 74 004-00	handle	1	10
2	04 27 74 004 00-00	rosette	1	10
3	90 12 12 002 00 90	fixing cap	1	2
4	09 31 11 055 90	pin	1	2
5	09 27 74 004-00	rosette	1	10
6	04 29 06 020 00-00	spindle	1	10
7	09 14 10 060 90	seal	1	2
8	09 29 06 020-00	spindle	1	10
9	09 14 15 020 90	ring	1	2
10	09 23 30 023 90	nut	1	2
11	09 30 01 107 90	sleeve	1	2
12	90 90 03 143 00 90	top	1	2

**xTOOL Concealed thermostat without volume control 3/4"**

36 503 979



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

	Chrome	36 503 979-00
	Brushed Platinum	36 503 979-06
	Platinum	36 503 979-08
	Durabress (23kt Gold)	36 503 979-09
	Matte White	36 503 979-10
	Dark Chrome	36 503 979-19
	Brushed Durabress (23kt Gold)	36 503 979-28
	Matte Black	36 503 979-33
	Brushed Champagne (22kt Gold)	36 503 979-46
	Champagne (22kt Gold)	36 503 979-47
	Brushed Chrome	36 503 979-93
	Brushed Dark Platinum	36 503 979-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control** 35 503 970 90  
 •min. recess depth 85 mm  
 •max. recess depth 110 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction** 12 340 970 90

**Required miscellaneous**




**xGRID Installation track 555 mm** 12 360 970 90

xTOOL Concealed thermostat without volume control 3/4"

---


36 503 979

mm [inches]

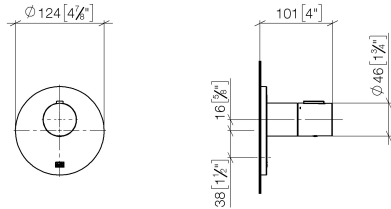

**xTOOL Concealed thermostat without volume control 3/4"**

36 503 979

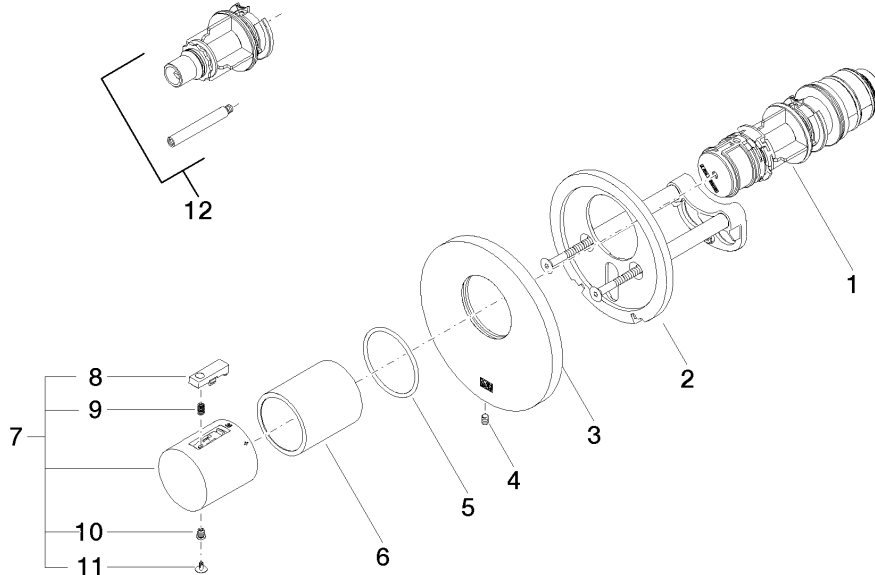


**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 065 00 90	cartridge	1	2
2	90 11 01 196 00 90	base	1	2
3	09 11 02 537-00	cover	1	10
4	09 31 11 048 90	pin	1	2
5	09 14 10 049 90	seal	1	2
6	09 21 02 112-00	sleeve	1	10
7	90 17 33 004 00-00	handle	1	10
8	90 21 33 010 00-13	handle	1	2
9	90 16 02 027 00 90	spring	1	2
10	09 30 30 136 90	screw	1	2
11	09 31 20 049-00	plug	1	10
12	12 178 970 90	Extension 46 mm	1	2

## Concealed wall elbow

---

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

## Recommended miscellaneous

---

**Leak protection 1/2"**


12 010 970 90



## Concealed wall elbow

#Error


mm [inches]

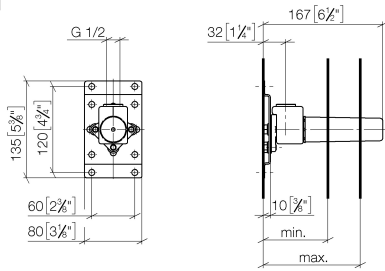

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

## Concealed wall elbow

#Error

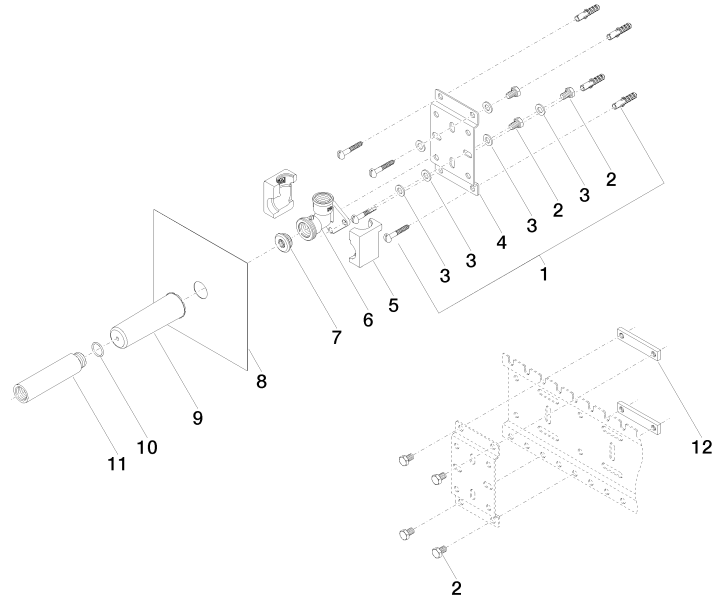


### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2



**xTOOL Concealed thermostat module with 2 valves**

#Error



- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 2x female thread 3/4" outlet, right/left alternatively
- 3x dust cover
- 3x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)

**Recommended miscellaneous**

**Extension 28 mm**

12 177 970 90



**Recommended miscellaneous**


**Extension 46 mm**

12 178 970 90



**Recommended miscellaneous**

**Drybox Thermostat module with 2 valves** 39 521 970 90  
 • Overflow is part of the scope of delivery.



**Recommended miscellaneous**

**xGRID Attachment set for integrating in the dry wall construction** 12 340 970 90




**Required miscellaneous**

**xGRID Installation track 555 mm** 12 360 970 90




## xTOOL Concealed thermostat module with 2 valves

#Error

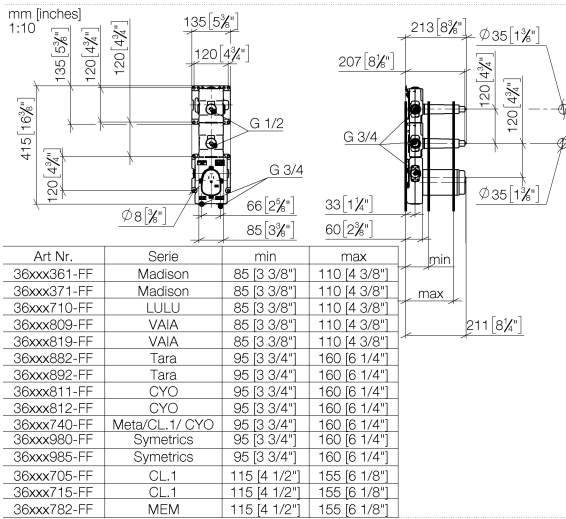


### Flow rate chart

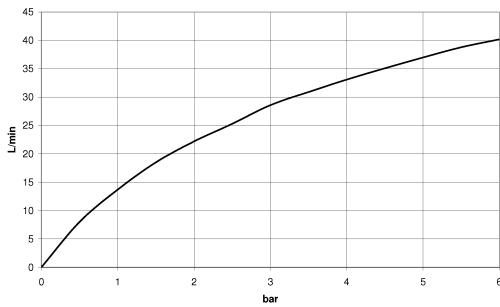

## xTOOL Concealed thermostat module with 2 valves

#Error

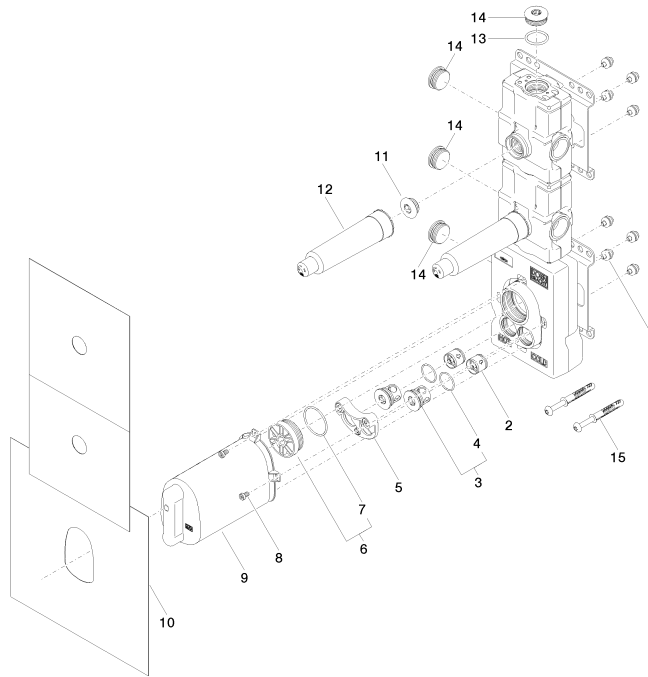


### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 23 01 091 00 90	set	8	2
2	90 23 01 045 00 90	back-flow preventer	2	2
3	04 21 34 077 00 90	nipple	2	2
4	09 14 10 098 90	seal	2	2
5	90 12 12 218 00 90	base	1	2
6	04 31 20 100 00 90	plug	1	2
7	09 14 10 111 90	seal	1	2
8	09 30 30 112 90	screw	4	2
9	04 21 02 174 00 90	cap	1	60
10	04 14 03 073 02 90	gasket kit	1	60
11	04 31 20 006 00 90	plug	2	2
12	09 21 02 173 90	cap	2	2
13	09 14 10 009 90	seal	1	2
14	09 31 20 003 90	plug	4	2
15	04 30 31 054 00 90	fixing set	2	2

## Drybox Thermostat module with 2 valves

---

#Error




- Dimensions 300 x 600 x 108 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

## Drybox Thermostat module with 2 valves

#Error

mm [inches]  
M 1:10

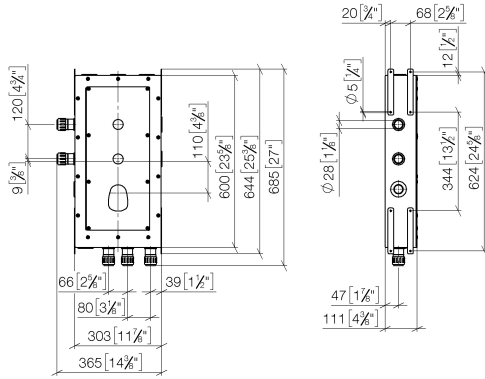

## Leak protection 1/2"

---

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

## Leak protection 1/2"

---

#Error

mm [inches]

