

Rain shower with wall fixing 300 mm

28 679 970



- 450 mm projection
- rain shower Ø 300 mm
- rain flow
- rosette Ø 60 mm
- 1/2" connection
- with anti-scale system
- quick clearing
- WRAS: 1707033
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Platinum	28 679 970-06
	Chrome	28 679 970-00
	Platinum	28 679 970-08
	Matte White	28 679 970-10
	Dark Chrome	28 679 970-19
	Brushed Durabronze (23kt Gold)	28 679 970-28
	Matte Black	28 679 970-33
	Brushed Champagne (22kt Gold)	28 679 970-46
	Champagne (22kt Gold)	28 679 970-47
	Brushed Chrome	28 679 970-93
	Brushed Dark Platinum	28 679 970-99

Recommended miscellaneous



Concealed wall elbow


35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm


Rain shower with wall fixing 300 mm

28 679 970

mm [inches]

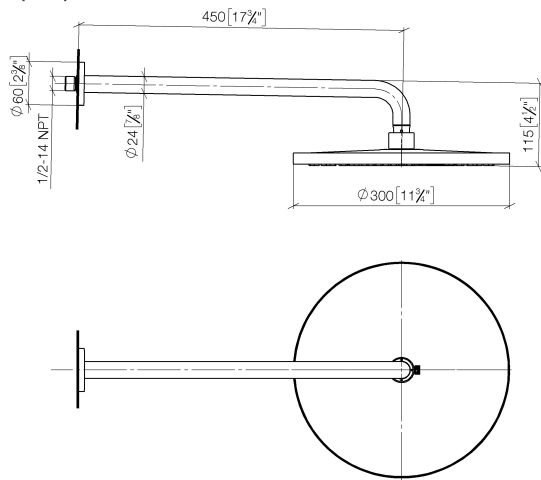


Flow rate chart

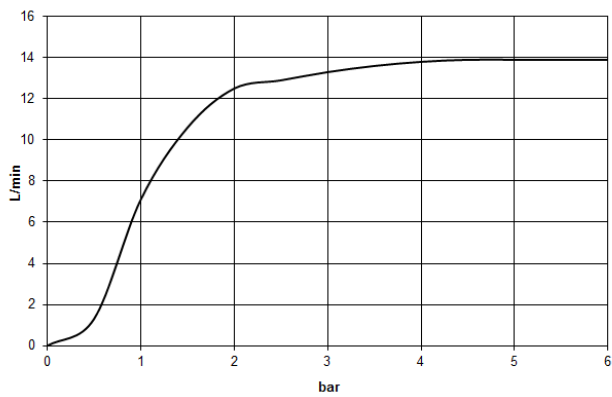

Rain shower with wall fixing 300 mm

28 679 970

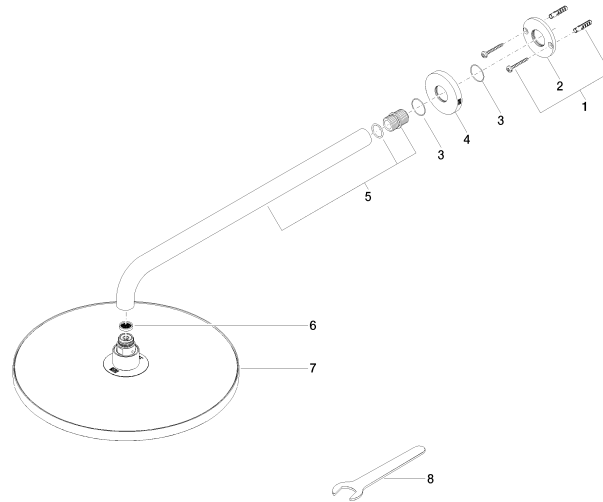

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 032 00 90	fixing set	1	2
2	09 17 20 120 90	holder	1	2
3	09 14 10 150 90	seal	2	2
4	09 27 97 015-06	rosette	1	10
5	90 11 03 070 00-06	pipe	1	10
6	09 23 01 075 90	insert	1	2
7	04 12 05 091 00-06	shower	1	10
8	09 30 09 069 90	key	1	2

Hand shower set with integrated shower holder

27 802 660



- normal flow
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette Ø 60 mm
- 1/2" connection
- WRAS: 1912049

Intrinsic protection against back flow.

	Brushed Platinum	27 802 660-06
	Chrome	27 802 660-00 0010
	Chrome	27 802 660-00
	Brushed Platinum	27 802 660-06 0010
	Platinum	27 802 660-08
	Platinum	27 802 660-08 0010
	Matte White	27 802 660-10
	Matte White	27 802 660-10 0010
	Dark Chrome	27 802 660-19
	Dark Chrome	27 802 660-19 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28 0010
	Brushed Durabronze (23kt Gold)	27 802 660-28
	Matte Black	27 802 660-33 0010
	Matte Black	27 802 660-33
	Brushed Champagne (22kt Gold)	27 802 660-46
	Brushed Champagne (22kt Gold)	27 802 660-46 0010
	Champagne (22kt Gold)	27 802 660-47
	Champagne (22kt Gold)	27 802 660-47 0010
	Brushed Chrome	27 802 660-93
	Brushed Chrome	27 802 660-93 0010
	Brushed Dark Platinum	27 802 660-99
	Brushed Dark Platinum	27 802 660-99 0010

Hand shower set with integrated shower holder

27 802 660

Recommended miscellaneous



Concealed wall elbow


- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90


Hand shower set with integrated shower holder

27 802 660

mm [inches]

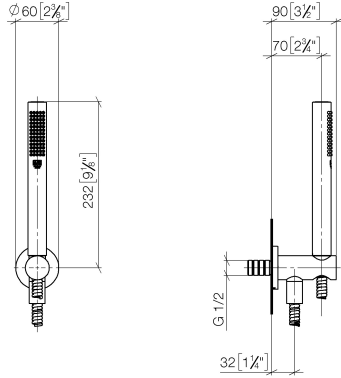


Flow rate chart

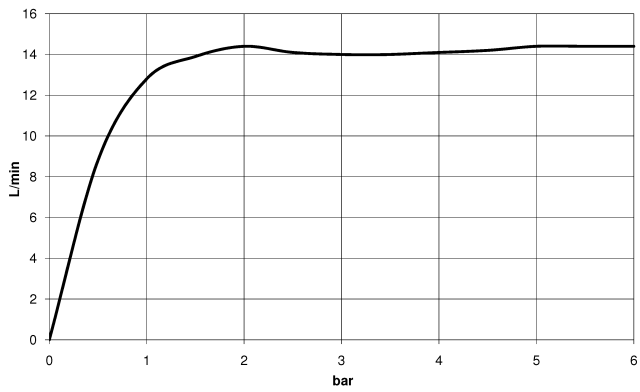

Hand shower set with integrated shower holder

27 802 660

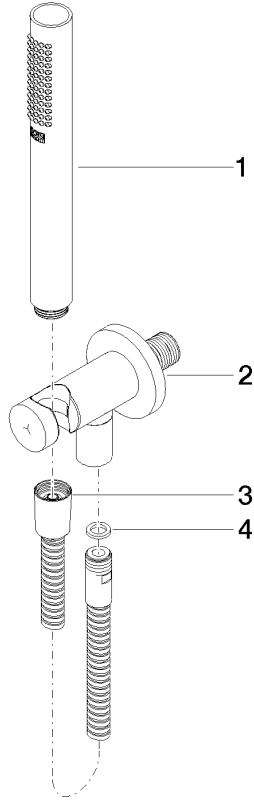

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 019 979-06	Hand shower	1	10
2	28 490 660-06	Wall elbow with integrated shower holder	1	10
3	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 1250 mm	1	10
4	09 14 20 026 90	seal	1	2

Wall valve clockwise closing 1/2"

36 607 892

- rosette Ø 55 mm
- head part with cut-to-length spindle and sleeve



	Brushed Platinum	36 607 892-06
	Chrome	36 607 892-00
	Platinum	36 607 892-08
	Matte White	36 607 892-10
	Dark Chrome	36 607 892-19
	Brushed Durabronze (23kt Gold)	36 607 892-28
	Matte Black	36 607 892-33
	Brushed Champagne (22kt Gold)	36 607 892-46
	Champagne (22kt Gold)	36 607 892-47
	Brushed Chrome	36 607 892-93
	Brushed Dark Platinum	36 607 892-99

Required miscellaneous



Wall valve 1/2"


35 607 970 90

- min. recess depth 85 mm
- max. recess depth 145 mm

Wall valve clockwise closing 1/2"


36 607 892

mm [inches]



Wall valve clockwise closing 1/2"

36 607 892

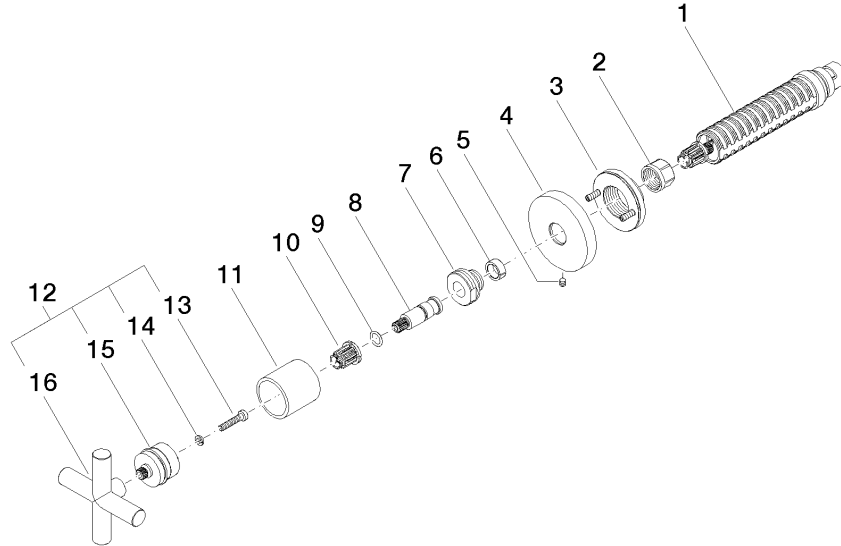

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 90 03 143 00 90	top	1	2
2	09 23 30 023 90	nut	1	2
3	90 21 02 108 00 90	disc	1	2
4	09 27 89 108-06	rosette	1	10
5	09 31 11 007 90	pin	1	2
6	09 14 15 020 90	ring	1	2
7	09 24 05 002 90	nipple	1	2
8	09 29 06 022 90	spindle	1	2
9	09 14 10 060 90	seal	1	2
10	90 12 12 002 00 90	fixing cap	1	2
11	09 21 02 144-06	sleeve	1	10
12	04 20 89 010 00-06	handle	1	60
13	09 30 30 075 90	screw	1	2
14	09 30 11 029 90	disc	1	2
15	90 12 12 007 00-06	base	1	10
16	09 20 89 010-06	handle	1	10

xTOOL Concealed thermostat without volume control 3/4"

36 503 979



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

	Brushed Platinum	36 503 979-06
	Chrome	36 503 979-00
	Platinum	36 503 979-08
	Durabrace (23kt Gold)	36 503 979-09
	Matte White	36 503 979-10
	Dark Chrome	36 503 979-19
	Brushed Durabrace (23kt Gold)	36 503 979-28
	Matte Black	36 503 979-33
	Brushed Champagne (22kt Gold)	36 503 979-46
	Champagne (22kt Gold)	36 503 979-47
	Brushed Chrome	36 503 979-93
	Brushed Dark Platinum	36 503 979-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control 35 503 970 90
 •min. recess depth 85 mm
 •max. recess depth 110 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction 12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm 12 360 970 90

xTOOL Concealed thermostat without volume control 3/4"


36 503 979

mm [inches]

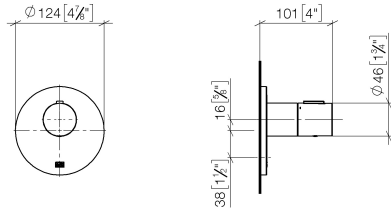

xTOOL Concealed thermostat without volume control 3/4"

36 503 979

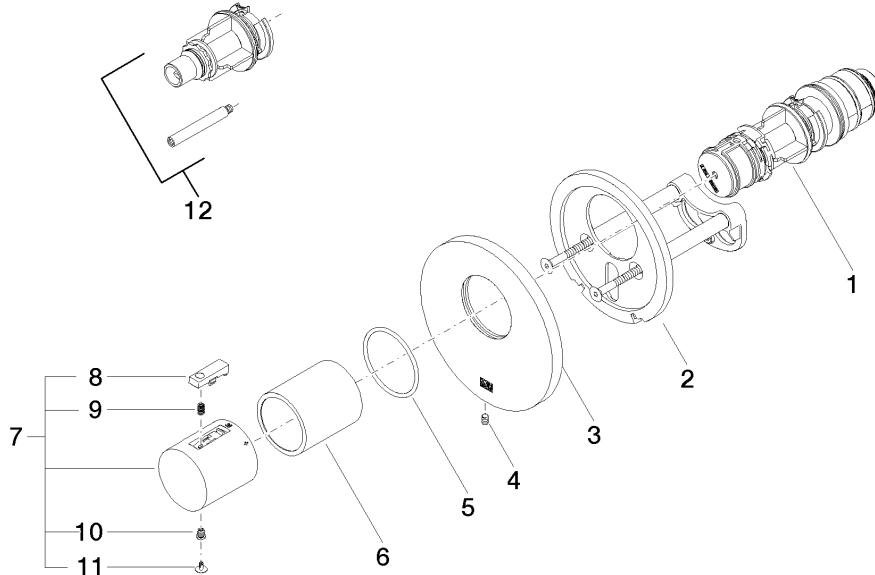

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 065 00 90	cartridge	1	2
2	90 11 01 196 00 90	base	1	2
3	09 11 02 537-06	cover	1	10
4	09 31 11 048 90	pin	1	2
5	09 14 10 049 90	seal	1	2
6	09 21 02 112-06	sleeve	1	10
7	90 17 33 004 00-06	handle	1	10
8	90 21 33 010 00-13	handle	1	2
9	90 16 02 027 00 90	spring	1	2
10	09 30 30 136 90	screw	1	2
11	09 31 20 049-13	plug	1	30
12	12 178 970 90	Extension 46 mm	1	2

Concealed wall elbow

#Error



- red brass, lead-free
- female thread 1/2" connection
- 1x female thread 1/2" outlet
- dust cover
- anti-water packing
- soundproofing

For wall-mounted spouts and wall outlet elbows with 1/2" connection.

Recommended miscellaneous

Leak protection 1/2"


12 010 970 90



Concealed wall elbow

#Error


mm [inches]

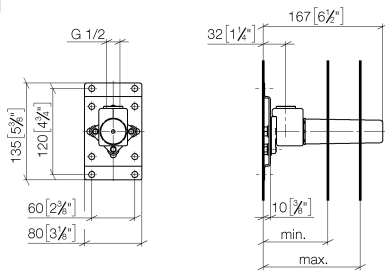

	min	max
CL. 1	90 [3 1/2"]	163 [6 3/8"]
CL. 2	68 [2 5/8"]	135 [5 3/8"]
Domicil	90 [3 1/2"]	163 [6 3/8"]
Gentle	90 [3 1/2"]	163 [6 3/8"]
IMO	90 [3 1/2"]	163 [6 3/8"]
Lissé	90 [3 1/2"]	163 [6 3/8"]
MEM	90 [3 1/2"]	163 [6 3/8"]
Symetrics	90 [3 1/2"]	163 [6 3/8"]
Vaia	90 [3 1/2"]	163 [6 3/8"]

Concealed wall elbow

#Error

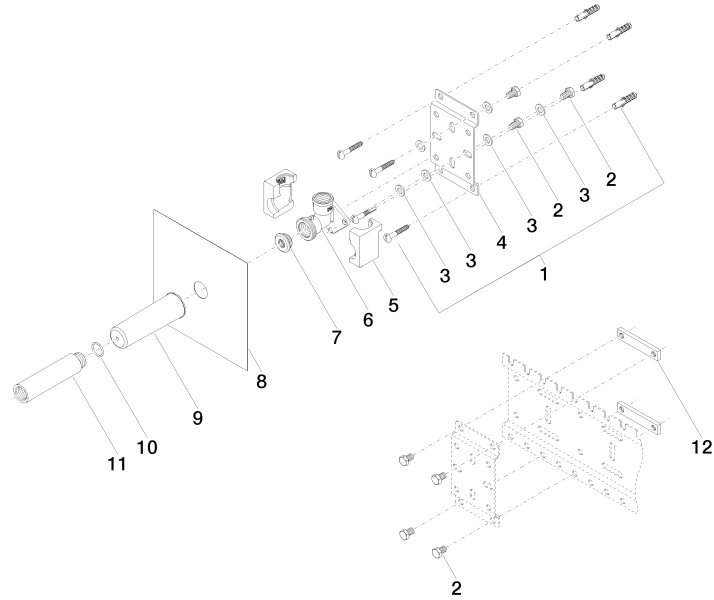


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 31 024 01 90	fixing set	2	2
2	09 30 30 152 90	screw	7	2
3	09 30 11 139 90	disc	6	2
4	09 17 20 094 90	holder	1	2
5	09 11 11 036 90	accessories	1	2
6	09 11 03 041 10 90	connection	1	2
7	04 31 20 006 00 90	plug	1	2
8	04 14 03 072 00 90	gasket kit	1	2
9	09 21 02 102 90	cap	1	2
10	09 14 10 010 90	seal	1	2
11	09 24 03 169 10 90	adaptor	1	2
12	09 17 20 100 90	holder	2	2

xTOOL Concealed thermostat module with 2 valves

#Error



- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 2x female thread 3/4" outlet, right/left alternatively
- 3x dust cover
- 3x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)

Recommended miscellaneous

Extension 28 mm

12 177 970 90



Recommended miscellaneous


Extension 46 mm

12 178 970 90



Recommended miscellaneous

Drybox Thermostat module with 2 valves 39 521 970 90
 • Overflow is part of the scope of delivery.



Recommended miscellaneous

xGRID Attachment set for integrating in the dry wall construction 12 340 970 90




Required miscellaneous

xGRID Installation track 555 mm 12 360 970 90




xTOOL Concealed thermostat module with 2 valves

#Error

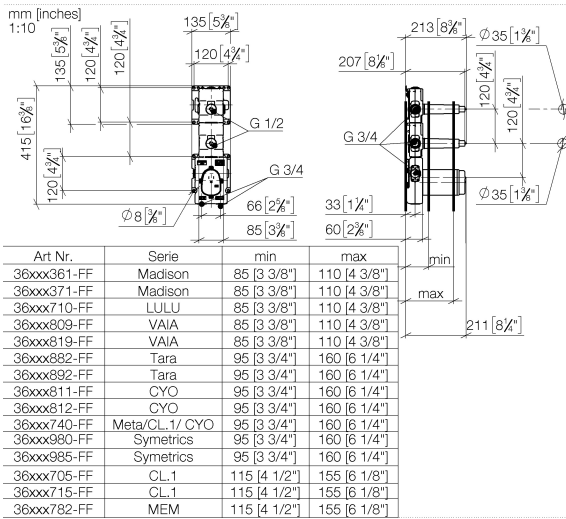


Flow rate chart

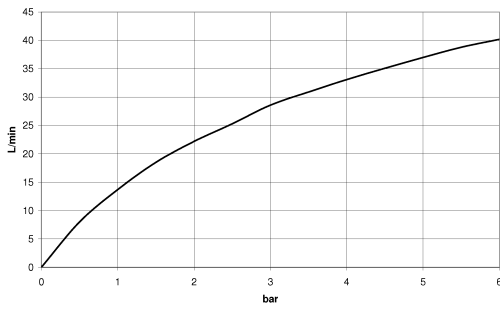

xTOOL Concealed thermostat module with 2 valves

#Error

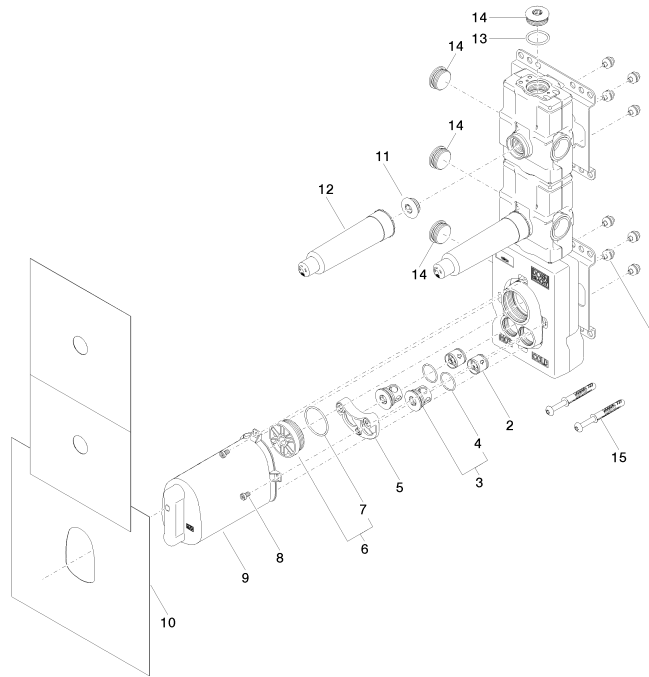


Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 23 01 091 00 90	set	8	2
2	90 23 01 045 00 90	back-flow preventer	2	2
3	04 21 34 077 00 90	nipple	2	2
4	09 14 10 098 90	seal	2	2
5	90 12 12 218 00 90	base	1	2
6	04 31 20 100 00 90	plug	1	2
7	09 14 10 111 90	seal	1	2
8	09 30 30 112 90	screw	4	2
9	04 21 02 174 00 90	cap	1	60
10	04 14 03 073 02 90	gasket kit	1	60
11	04 31 20 006 00 90	plug	2	2
12	09 21 02 173 90	cap	2	2
13	09 14 10 009 90	seal	1	2
14	09 31 20 003 90	plug	4	2
15	04 30 31 054 00 90	fixing set	2	2

Drybox Thermostat module with 2 valves

#Error




- Dimensions 300 x 600 x 108 mm
- brushed stainless steel cover
- stainless steel casing
- Overflow is part of the scope of delivery.

Drybox Thermostat module with 2 valves

#Error

mm [inches]
M 1:10

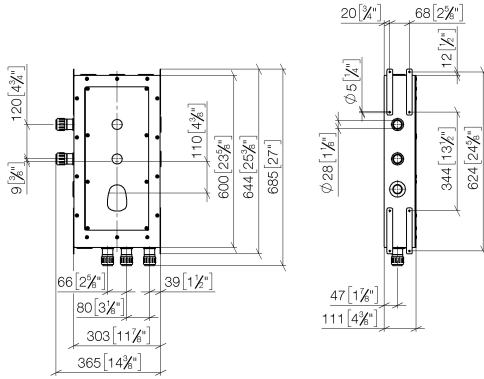

Leak protection 1/2"

#Error



- rubber sleeve
- plastic cap
- conical nut 1/2" with cutting ring for 15 mm PEX pipe
- coupling, male thread 1/2" x male thread 1/2"

Leak protection 1/2"

#Error

mm [inches]

